

Link to the product: <https://stair-lighting.com/duo-tango-p-1580.html>


Duo Tango

Price **38.26 Euro**

Availability **Available**

Shipping time **5 days**

Number **1580**

Manufacturer **SKOFF**

Product description

DUO TANGO SKOFF is one of a collection of innovative luminaires with LED module called - Music Line. Models member DUO name has two LED light sources pointing in opposite directions.

The aim of framing is possible to install the light source and connecting it to the network. In this case, a hole or a tin-electric installation with a diameter of 6 cm. The dimensions of the device are 7.3 x 11,3cm. The color of the surface luminaire customer can choose between aluminum and polished stainless steel.

We must mention that the LED module integrated into the luminaire has a shelf life of 50 thousand. hours, so its non-convertibility is not an obstacle in the way that energy conservation for many years. Parallel connection is recommended. The power consumption for each of the two levels of protection (IP20 - standard protection inside and IP56 - protects the LED from such factors as, for example. A stream of water) is maintained in the range 1,2-2W depending on the color of emitted light. Here we have 5 options: white, warm white, green, red and blue.

As part of modern lighting systems it meets the needs of many customers and allows you to enjoy a good investment. It is used in rooms of all types, from office after private. As an architectural lighting has several goals. It emphasizes the architecture and decor. It ensures that there is no so-called. glare, unpleasant for our eyes. They are distinguished by consistent design characterize each family of the Music Line.

LED Lighting fitting, designed to highlight passages

Advantages:

- Long life - 50 000 h
- Very low energy consumption
- Robust design
- Material: Stainless steel or Aluminum

Application:

- illumination of passageways
- stairs
- glass cabinets
- decorating the walls with light

Available types

Symbol	Finishing	Color of light	Power consumption (W)	Index
ML-DR-K-W	Stainless steel	white	1,6	ML-RDU-K-W
ML-DR-K-WW	Stainless steel	warm white	1,6	ML-RDU-K-H
ML-DR-K-R	Stainless steel	red	2,0	ML-RDU-K-R
ML-DR-K-B	Stainless steel	blue	1,6	ML-RDU-K-B
ML-DR-K-G	Stainless steel	green	1,2	ML-RDU-K-G
ML-DR-G-W	Aluminum	white	1,6	ML-RDU-G-W
ML-DR-G-WW	Aluminum	warm white	1,6	ML-RDU-G-H
ML-DR-G-R	Aluminum	red	2,0	ML-RDU-G-R
ML-DR-G-B	Aluminum	blue	1,6	ML-RDU-G-B

ML-DR-G-G		Aluminum	green	1,2	ML-RDU-G-G
-----------	--	----------	-------	-----	------------




Technical data

Supply voltage:	10 V DC
Light source:	LED
Installation:	<ul style="list-style-type: none">• in the installation box Ø60• in the opening Ø60
Ingress Protection Rating:	IP 20
Type of connection:	parallel
Recommended power supplies:	ZOL6, ZOL7, ZOL15, ZOL16

Commercial data

Device weight:	...
Device dimensions:	73 x 113 mm
Warranty period:	24 mo.



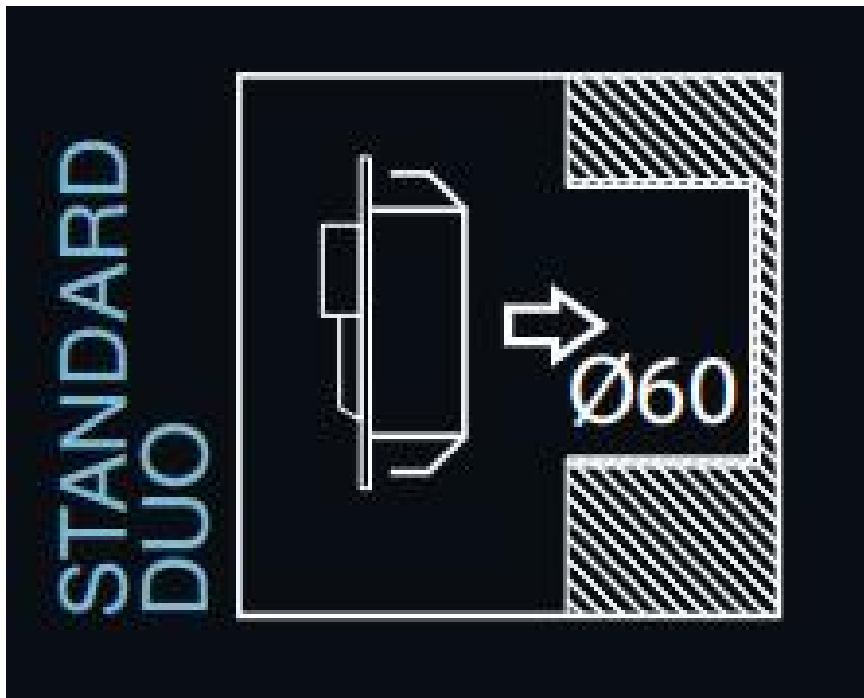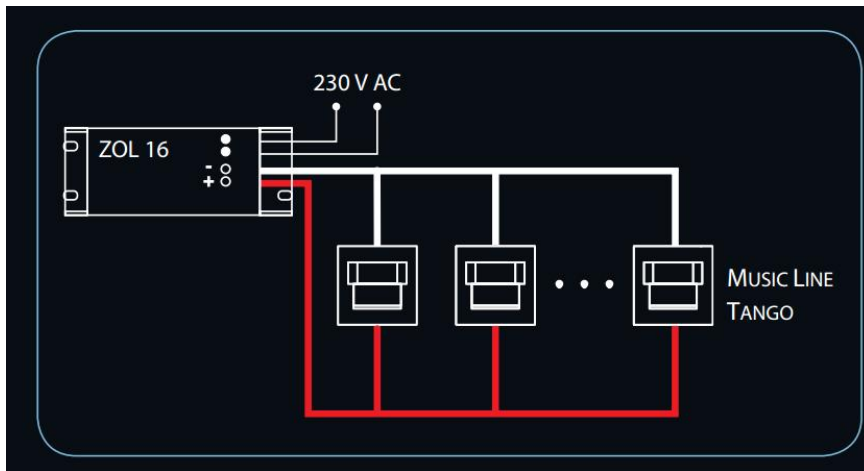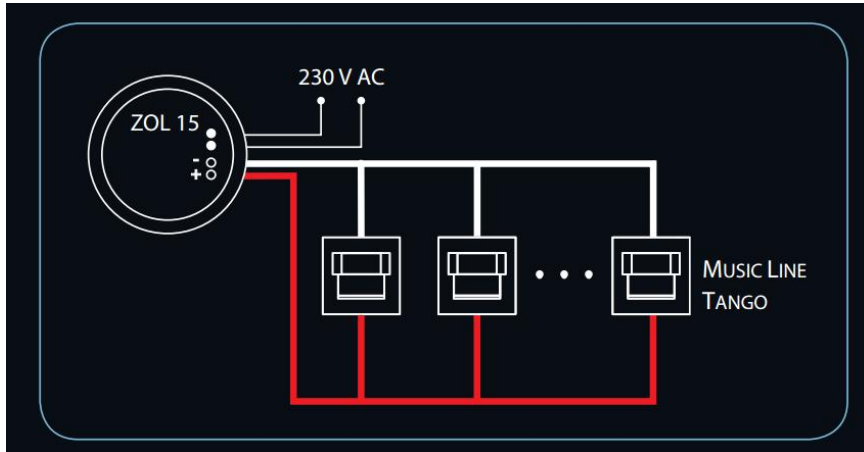

This product has additional options:

Housing: INOX , Aluminum

Light color: Warm white , Cold white , blue , Green , Red

Waterproof: IP20 , IP56 (+ 3.50 Euro)