

Link to the product: <https://stair-lighting.com/fut070-6w-anti-glare-rgbccct-led-downlight-p-2648.html>

HIDOLUX® LEADER OF SMART LIFE



FUT070 6W Anti-glare RGB+CCT LED Downlight

Price	47.73 Euro
Availability	Available
Shipping time	4 days
Number	2648
Manufacturer	Mi.Light

Product description

- **Product Name: 6W Anti-glare RGB+CCT LED Downlight**
- Model No.: FUT070
- Power: 6W
- Input Voltage: AC100~240V 50/60Hz
- Color Temperature: 2700K~6500K
- Luminous Flux: 400LM
- CRI:>80
- PF: >0.5
- Lifespan: 50000 hours
- Beam Angle: 60°
- Control Distance□30m
-

6W Anti-glare RGB+CCT LED Downlight

Anti-glare designing; 2.4G RF remote controller, 16 million color change; Saturation, color temperature and brightness adjustable; Auto-sync and auto-transmitting function make the control distance limitless



16 Millions of
colors to choose



Color temperature
2700~6500K



Dimmable
Saturation control




Support third party
voice control



Signal transmitting &
Modes synchronization















2.4GHz RF Remote Control

Controlled by 2.4GHz remote, control distance is 30M

Compatible with



FUT089 FUT088 FUT092 FUT096 B8 B4/T4 B3/T3 B0 WL-Box1



Support Smart phone APP control and third party voice control

It need 2.4GHz gateway(WL-Box1) for smart phone control or third party voice control




16 million color change freely

Make the lighting atmosphere you want easily
satisfy your more using requirements



Warm white to cool white adjustable freely stepless brightness dimming

Color temperature: 2700K~6500K, steplessly adjust the lamp brightness
Soft and delicate light satisfy different lighting requirements

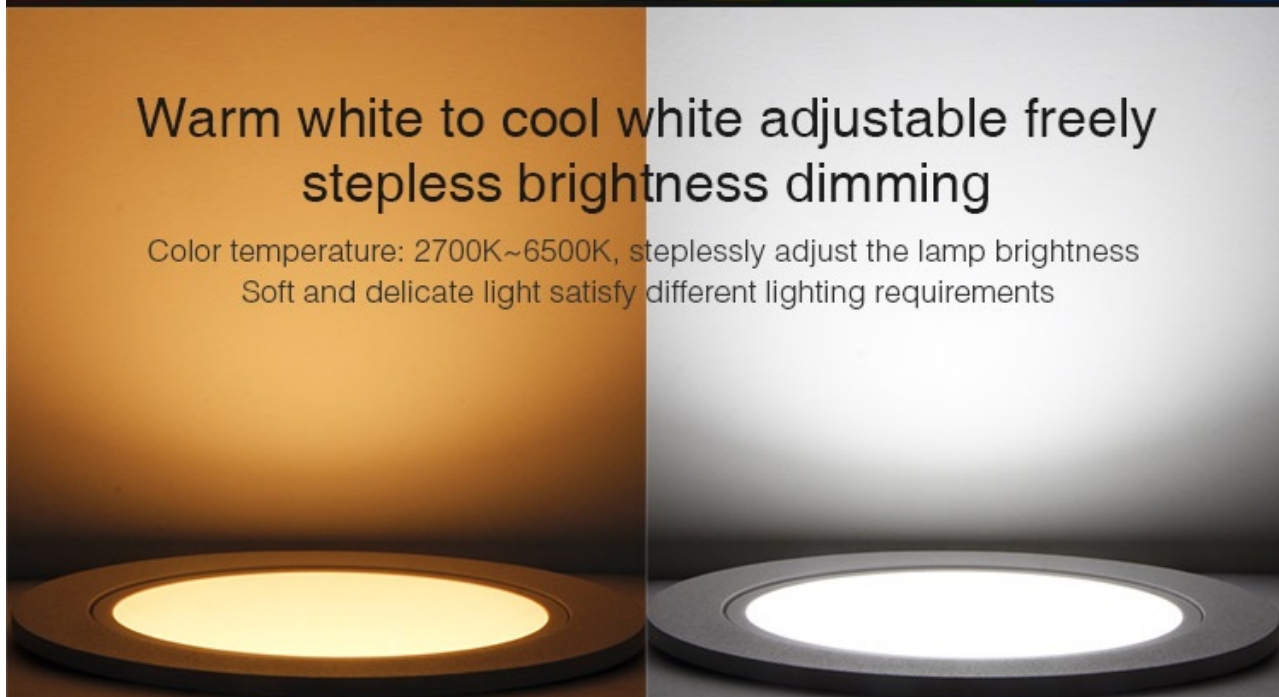

Deeply anti-glare design

Refraction material and deepened cover prevent glare effectively and offer you healthy ambient light



Anti-glare range
(shielding angle) $>30^\circ$





Signal Transmitting

One Downlight can transmit the signals from the remote control to another downlight within 30m, as long as there is a downlight within 30m, the remote control distance can be limitless.

Modes Synchronization

Different downlight can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

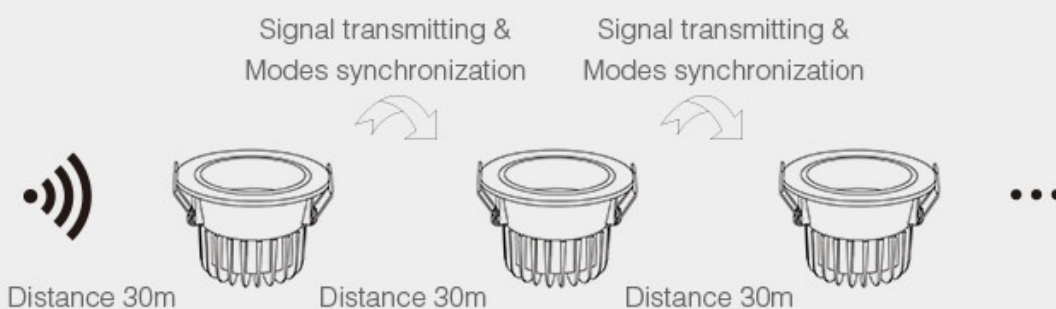

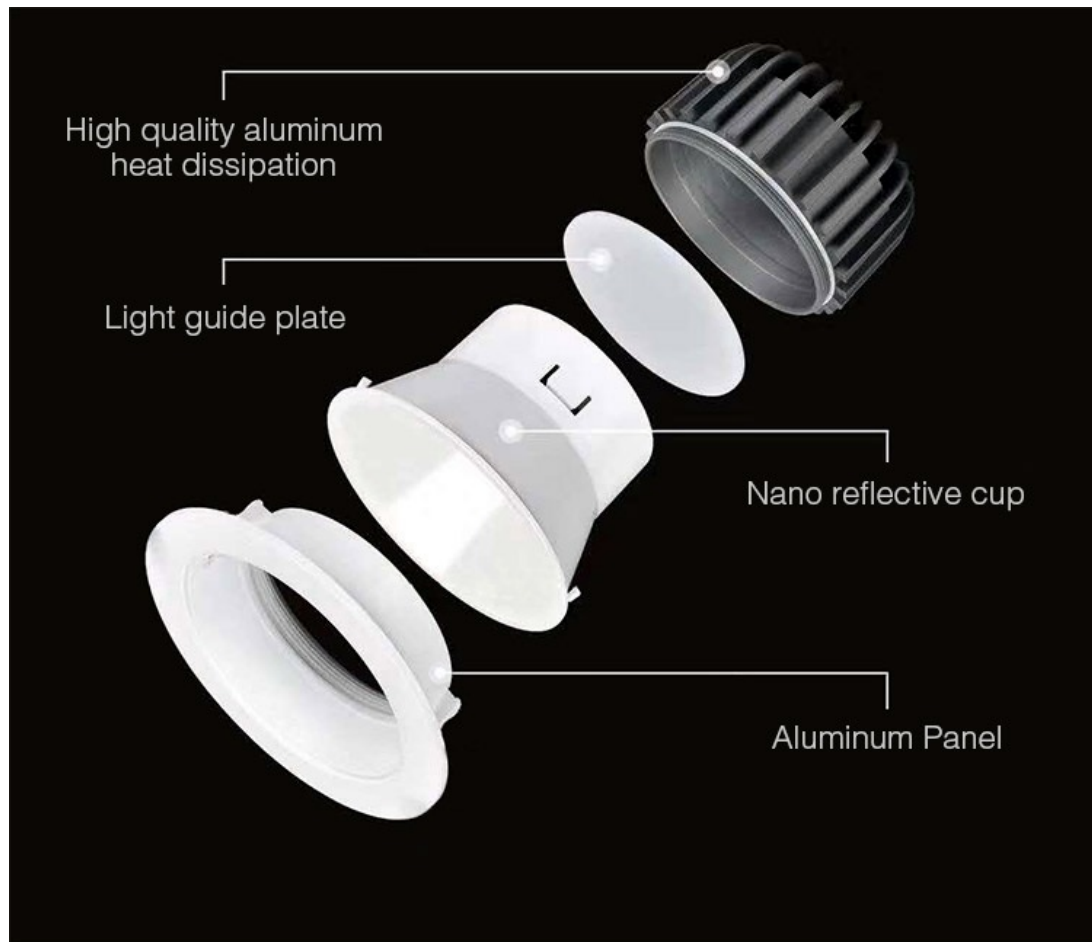



This product has additional options:

Light color - MILIGHT: RGB + WW , RGB + CW , CW/WW