

Link to the product: <https://stair-lighting.com/led-ceiling-luminary-n-led-l113-40w-4000lm-5000k-p-1661.html>



LED ceiling luminary - N-LED-L113 - 40W - 4000lm - 5000K

Price	119.01 Euro
Availability	On order
Shipping time	10 days
Number	1661
Manufacturer	RESTAN

Product description

Unique solution using Philips components. Recessed ceiling N-LED perfectly suited for LED lighting industrial halls, warehouses, passageways. Maximum use of ergonomics and economics of the housing in conjunction with highly efficient light source and power supply with high efficiency makes offer you premium product. Quality is guaranteed five-year warranty.


Maksymalny pobór mocy The maximum power consumption Die maximale Leistungsaufnahme Максимальная потребляемая мощность Maximální spotřeba energie	40W
Barwa światła Light color Lichtfarbe светлый цвет barva světla	5000K
Strumień światła emitowany z oprawy Stream of light emitted from the luminaire Strom von Licht von der Leuchte emittierten Поток света, излучаемого из светильника Potok světla, které vydává svítidla	4000m (+/- 7,5%)
Źródło światła Light source Lichtquelle Источник света Světelný zdroj	2x Philips LED Strip Gen3 Fortimo LED Strip Philips
Wydajność źródła światła efficiency the light source Effizienz der Lichtquelle Эффективность источника света efektivnost světelný zdroj	156lm/W
Wydajność oprawy efficiency of the fitting Effizienz des Armaturen Эффективность фитинг efektivnost armatury	100lm/W
Zasilanie supply voltage Versorgungsspannung Напряжение питания Napájecí napětí	230V
Żywotność źródła światła	> 50 000h (L70)

The life of the light source Die Lebensdauer der Lichtquelle, Жизнь источника света Životnosť svietelného zdroje	
Współczynnik oddawania barw Color Rendering Index (CRI) Farbwiedergabeindex Индекс цветопередачи Index podání barev	Ra > 80
Temperatura pracy Operating temperature range Arbeitstemperaturbereich Диапазон рабочих температур Rozsah provozních teplot	-20 +40°C
Klasa ochrony na warunki zewnętrzne Class of protection to external conditions Schutzklasse auf äußere Bedingungen Класс защиты от внешних условий Třída ochrany na vnějších podmínkách	IP20
Klasa energetyczna energy class Energieeffizienzklasse энергетический класс třída energetické účinnosti	A+
Wymiary dimensions Dimensionen Габаритные размеры rozměry	1130x50x60 mm
Gwarancja Warranty Garantie Гарантия Záruka	5 lat/years/Jahre/лет/léta
Parametry strumienia światła podano dla temperatury 25°C Parameters of luminous flux given for a temperature of 25°C Parameter des Lichtstroms für eine Temperatur von 25°C gegeben Параметры светового потока даны для температуре 25°C Parametry svietelného toku s ohledem na teplotě 25°C	
Produkt polski Made in Poland In Polen hergestellt Сделано в Польше Vyrobeno v Polsku	







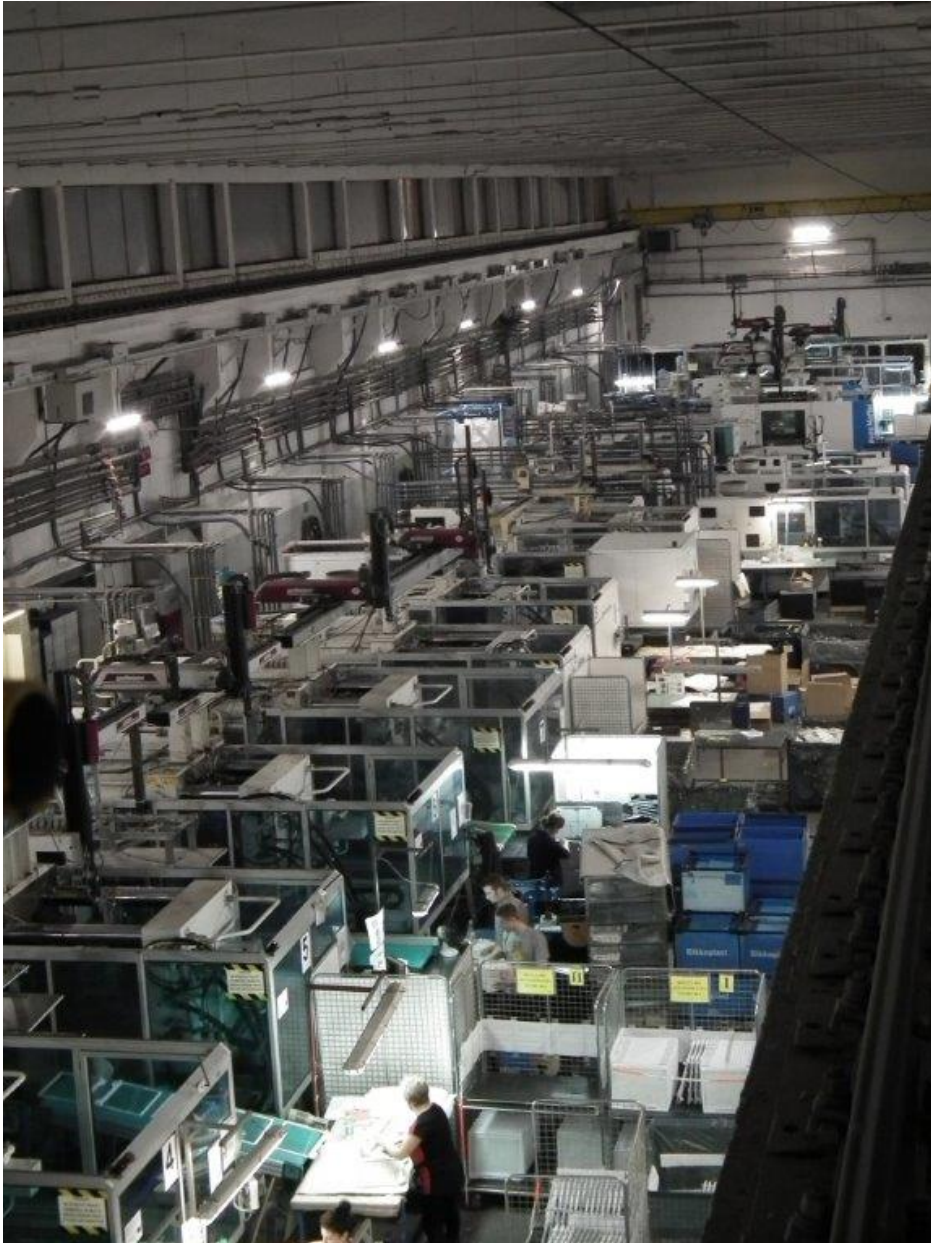





This product has additional options:

Type of cover: Frosted , Transparent

Dimmable: No , Yes (+ 31.82 Euro)

Mounting the luminaire: Surface-mounted - ceiling , Surface mounting - wall , Surface mounting - ceiling - wire rope fasteners (+ 15.91 Euro)

CRI: CRI > 80 , CRI > 90 (+ 20.05 Euro), CRI>95 (+ 119.65 Euro)