

Link to the product: <https://stair-lighting.com/led-floodlights-ecopro-30w-p-916.html>

LED floodlights - ECOPRO - 30W

Price	34.15 Euro
Availability	Availability - 3 days
Shipping time	4 days
Number	916
Manufacturer	SMART

Product description

Construction:

1 Housing - cast aluminum with flat tempered glass

2 reflector - aluminum sheet wyblyszczona

3 mounting bracket: Steel with 3 mounting holes (can adjust the angle) - at the bottom of the enclosure is plugged choke hole from which are derived power cables

other:

Permitted mounting on flammable surfaces. Equivalent to traditional halogen floodlight 75-90W.

Jobs at -40 ° C to 50 ° C. Binding Hermetic

Purpose:

LED floodlight projector has features designed to illuminate buildings, interiors shop and storage monuments, parks, sports facilities, gardens, banners and more. Suitable for installation (in terms of higher levels of moisture and dust) both inside and outside. Design and directional light distribution provides a very good performance parameters.

Specification:

Rated voltage: 220-240V/AC ~ 50Hz

Color Temperature: 5500K

Color: cool white

Nominal life time: 50 000h

Lumen maintenance factor at the end of the nominal lifetime: 70%

Viewing angle: 120 °

Number of LEDs: 1x 30W

LED Type: COB (chip on board)

Degree of protection: IP65

Protection class: I

Coefficient of color rendering (Ra): ≥ 80

Power factor: > 0.9

The optimum operating conditions: -20 ° C ~ +55 ° C

Temperature of the enclosure: 63 ° C

Starting time: 0.2 sec

Number of cycles on / off: 200 000x

Warm-up time to 60% of: ≤ 0.1 s

NAŚWIETLACZ LED ECOPRO 30W IP65



Napięcie znamionowe: 220-240V/AC ~50Hz
Temperatura barwowa: 5500K
Barwa: zimny biały
Nominalny okres trwałości: 50 000h
Współczynnik zachowania strumienia światła po czasie: 70%
Kąt świecenia: 120°
Ilość diod: 1x 30W
Rodzaj diod: COB (chip on board)
Stopień szczelności: IP65
Klasa ochronności: I
Współczynnik oddania barw (Ra): ≥80
Właściwości: -20°C ~ +55°C
Optymalne warunki eksploatacji: 63°C
Maks. temp. obudowy: 0,2s
Czas zapłonu: 200 000x
Liczba cykli włącz/wyłącz: <0,1s
Czas nagrzania lampy do pełnej mocy:



Budowa


Obudowa: stop aluminium

Kolor: szary


UWAGA!

Lampa nie jest przeznaczona do oświetlenia akcentowego.

Moc	Barwa	Temperatura barwowa (K)	Strumień światła (lm)	Skuteczność światła (lm/W)	Kąt świecenia	Waga	Barcode
30W	zimny biały	5500	1950	65	120°	1,42kg	5903263465522

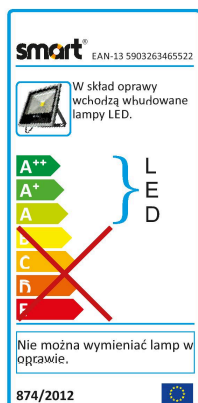

Wymiary



Nazwa	Moc	A	B	C
NAŚWIETLACZ ECOPRO	30W	222 mm	53 mm	227 mm