

Link to the product: <https://stair-lighting.com/profiel-led-folhak-p-2080.html>

## Profiel LED FOLHAK

Price	<b>2.46 Euro</b>
Availability	<b>Available</b>
Shipping time	<b>5 days</b>
Number	<b>2080</b>
Manufacturer	<b>KLUS</b>

### Product description

#### Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process.

[The details of the shipping method and packaging of the aluminum profiles you will find here \(click in the link\)](#)

Price for 1 meter length profile - no cover and end caps.

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab.

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".

If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.


For each country is different maximum length of the profile that we can send. It does not depend on us only by courier.

We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.

Profile do budowy sufitów w technologii napinanej folii /  
Profile für Folienspanndecken

## FOLHAK

REF. B8338

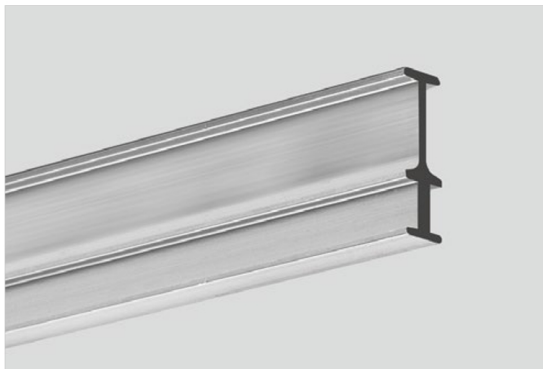

Łatwy montaż bez użycia narzędzi.

Jest kompatybilny ze standardowymi mocowaniami sufitów podwieszanych.

#### PRZEZNACZENIE PRODUKTU:


- do łączenia profilu FOLED ze standardową sprężyną systemów podwieszanych.

#### MONTAŻ:

- FOLHAK z jednej strony wsuwamy w tzw. zamek mały profilu FOLED, a z drugiej w sprężynę do podwieszeń.

#### DODATKOWE INFORMACJE:

- można stosować w odcinkach 20cm.

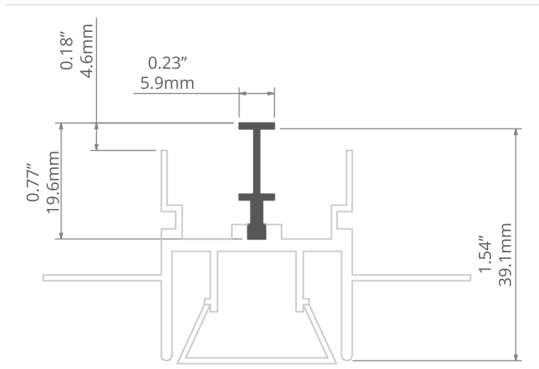

Leichte Montage ohne Werkzeuge.

Kompatibel mit Standard-Befestigungen der Hängedecken.

#### ANWENDUNG

- zum Verbinden der Profile FOLED mit einer Standardfeder der Abhängesysteme

#### MONTAGE

- FOLHAK – an einer Seite schiebt man das sog. kleine Schloss in das Profil FOLED, und an der anderen – eine Hängefeder

#### ZUSÄTZLICHE INFORMATIONEN

- es darf in 20cm langen Abschnitten verwendet werden

#### profil / Profil

długość / Länge	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m	Nieanodowany (surowe aluminium) / Nicht eloxiert (Aluminum Natur)	B8338NA_1
2 m		B8338NA_2

#### akcesoria / Zubehör


profil / Profil	
FOLED	B8332V1



Extrusions for building ceilings employing the stretch-film technology /  
Perfiles para construir la tecnología de techos tensados

## FOLHAK

REF. B8338

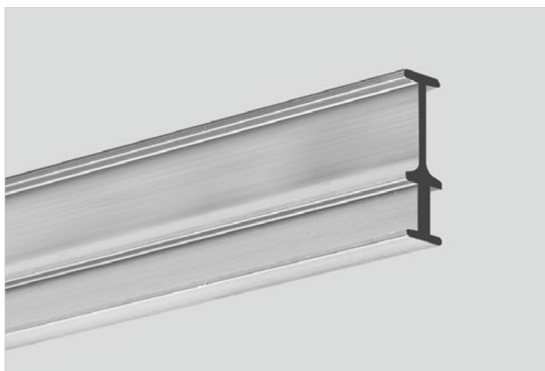

Easy to mount, no tools required.  
Compatible with standard fastenings  
of suspended ceilings.

### APPLICATION

- for connecting the FOLED extrusion with a standard spring of suspension systems.


### ASSEMBLY

- FOLHAK is inserted into the small lock of the FOLED extrusion on one side, and on the other into the spring of a suspension system.

### ADDITIONAL INFORMATION


- can be used in sections of (7.87" / 20cm).

### extrusion / perfil

length / longitud	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m	 Non anodized (raw) / Aluminio crudo (no anodizado)	<b>B8338NA_1</b>
78.7" / 2 m		<b>B8338NA_2</b>

### extrusion / perfil

extrusions / perfiles	
FOLED	<b>B8332V1</b>

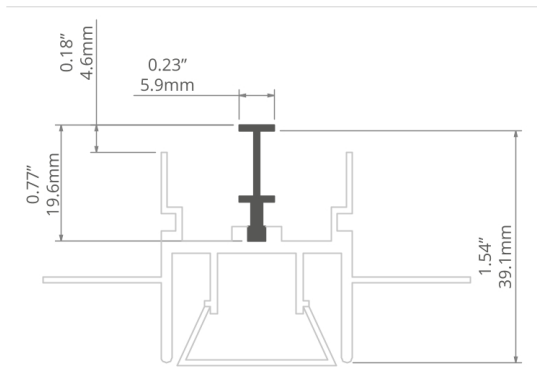

Fácil montar, no requiere herramientas.  
Compatible con fijaciones estándar de techos  
suspendido.

### APLICACIÓN

- para la conexión del perfil FOLED con un muelle estándar de los sistemas de suspensión.

### MONTAJE

- FOLHAK se inserta en la pequeña cerradura de el perfil FOLED en un lado, y en el otro en el muelle de un sistema de suspensión.

### INFORMACIÓN ADICIONAL

- puede ser utilizado en secciones de los (7.87" / 20cm).


The Folhak profile is a simple assembly product that can be made without tools. It is mainly used to connect the FOLED-v1 profile with the spring of suspension systems.

Mounting method:


On one side, the FOLHAK profile is inserted into the small FOLED profile lock and on the other a suspension spring.

The profile can be used in sections of 20 cm.


## PRZYKŁADY MONTAŻU / MOUNTING EXAMPLES

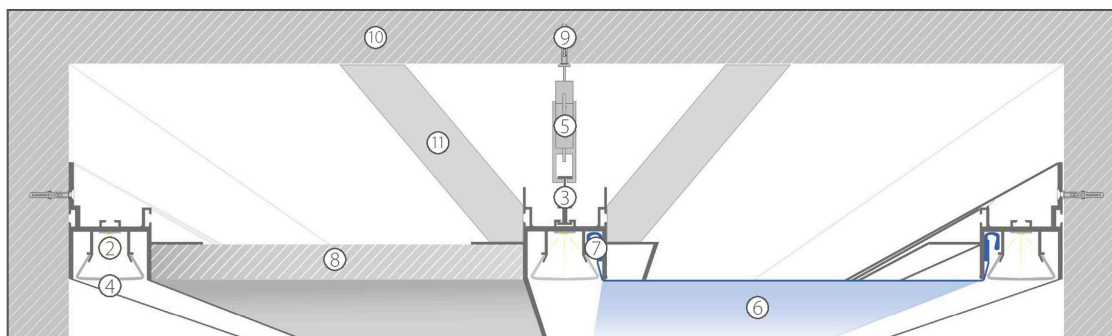

- ① FOLED
- ② FOLED-BOK
- ③ FOLHAK
- ④ osłona FOLED / cover FOLED
- ⑤ wieszak FOLED ze sprężyną / FOLED hanger with spring
- ⑥ folia sufitu napinanego / stretch ceiling foil
- ⑦ harpun sufitu napinanego / stretch ceiling hook
- ⑧ karton-gips / drywall
- ⑨ kołek do muru / wall plug
- ⑩ ściana / wall
- ⑪ wspornik / support

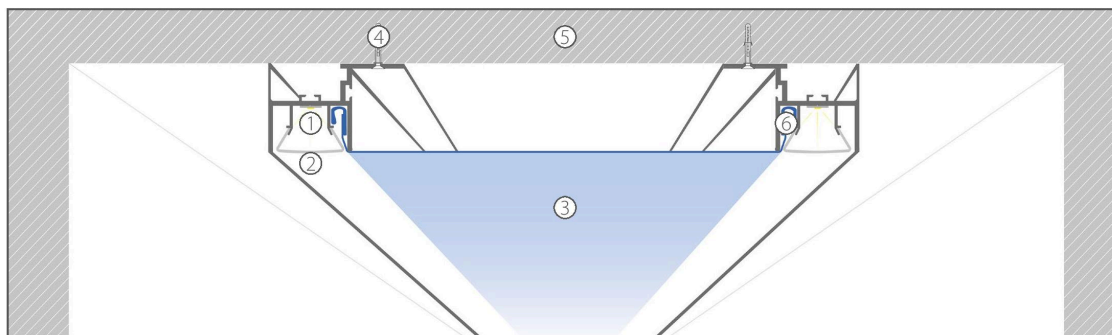

- ① FOLED-SUF
- ② osłona FOLED / cover FOLED
- ③ folia sufitu napinanego / stretch ceiling foil
- ④ kołek do muru / wall plug
- ⑤ ściana / wall
- ⑥ harpun sufitu napinanego / stretch ceiling hook

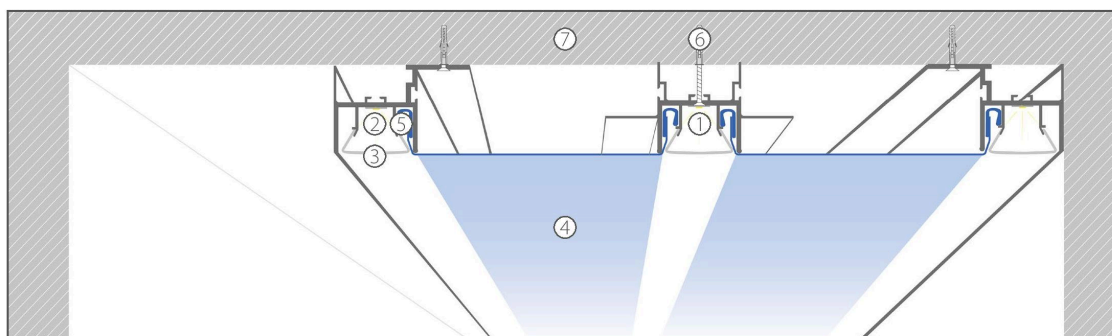

- ① FOLED
- ② FOLED-SUF
- ③ osłona FOLED / cover FOLED
- ④ folia sufitu napinanego / stretch ceiling foil
- ⑤ harpun sufitu napinanego / stretch ceiling hook
- ⑥ kołek do muru / wall plug
- ⑦ ściana / wall

