


Link to the product: <https://stair-lighting.com/profiel-led-krav-56-p-1394.html>

Profiel LED KRAV-56

Price	17.06 Euro
Availability	Available
Shipping time	5 days
Number	1394
Manufacturer	KLUS

Product description

Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process.

[The details of the shipping method and packaging of the aluminum profiles you will find here \(click in the link\)](#)

Price for the same profile without additional accessories.

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab.

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".

If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.

For each country is different maximum length of the profile that we can send. It does not depend on us only by courier.

We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.

Profile do podświetlania krawędzi szyb, tworzyw /
Profile für Glassantenbeleuchtung

KRAV-56

REF. 18017



Łatwy i pewny montaż do krawędzi płyt.
Wygodny montaż pasków led.
Przystosowany do płyt o grubościach od 5 mm do 6 mm.

PRZEZNACZENIE PRODUKTU:


- krawędziowe podświetlenie przezroczystych, transparentnych i mlecznych płyt.

MONTAŻ:

- montaż z zastosowaniem taśm samoprzylepnych i na "click".

DODATKOWE INFORMACJE:

- profil jest oprawą oświetleniową, nie pełni funkcji konstrukcyjnej.



Leichte und sichere Montage an dem Plattenrand.
Bequeme Montage von Led-Streifen.
Angepasst an 5 mm do 6 mm dicke Platten.

ANWENDUNG

- Randbeleuchtung durchsichtiger und milchiger Platten

MONTAGE

- Montage mit Klebebändern und durch Einrasten

ZUSÄTZLICHE INFORMATIONEN

- das Profil ist eine Leuchte, kein Bauteil

profil / Profil

długość / Länge	szerokość LED / LED-Breite	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m	7 mm	● Srebrny anodowany / Silber eloxiert	18017ANODAZM_1
2 m			18017ANODAZM_2
3 m			18017ANODAZM_3


akcesoria / Zubehör

zaślepki szare / graue Endkappen	
KRAV-56	24033

Extrusions for edge lighting of glass, plastic /
Perfiles para iluminación de bordes de vidrio y plástico

KRAV-56

REF. 18017

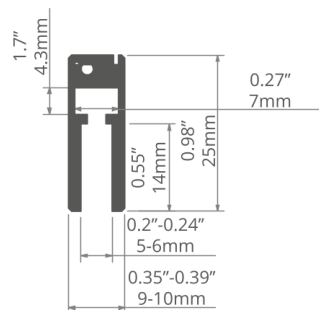

Easy and secure mounting to panel edges.
Convenient installation of led strips.
Adapted for panels with a thickness of (0.23" / 5-6 mm).

APPLICATION

- edge illumination of transparent and frosted panels.

ASSEMBLY

- installation using self-adhesive tape and clasps.

ADDITIONAL INFORMATION

- the extrusion is a lighting fixture, not a structural element.



Montaje fácil y seguro a los bordes del panel.
Instalación conveniente de tiras del LED.
Adaptado para paneles con un espesor de (0.23" / 5-6 mm).

APLICACIÓN

- iluminación del borde de los paneles transparentes y escarchadas.

MONTAJE

- instalación con cinta adhesiva y broches.

INFORMACIÓN ADICIONAL

- el perfil es una luminaria, no un elemento estructural.

extrusion / perfil

length / longitud	space for LED strip / espacio para tira de LED	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m	0.27" / 7 mm	● Silver anodized / Ánodo de plata	18017ANODAZM_1
78.7" / 2 m			18017ANODAZM_2
118" / 3 m			18017ANODAZM_3

accessories / accesorios

grey end caps / tapas finales gris	
KRAV-56	24033

KRAV extrusions are not construction extrusions!

LED KRAV profile 56 consists of two independent profiles: KRAV-D56 adapted for mounting LED strips, whose width amounts to a maximum of 6 mm and profile KRAV-Z56, which is the closing. Profiles also come with adhesive tape and silicone cord. These elements are designed to provide the perfect combination of both profiles.

KRAV profile 56 is used to illuminate the edge of the glass, and plastic sheets (e.g., Acrylic) having a thickness of 5 to 6mm. Please note that this is not a structural profile. Most often it is used to illuminate the various types of advertising, banner advertising, graphic characters. Sometimes it is used in luminaires, which were later placed in kitchens, living rooms, as well as in museums and galleries.

It has many advantages, one of which is the ability to adjust the profile of the thickness of the glass or plastic, so that the whole will be better to stick. Installation of LED strip is extremely easy. When the installation is carried out correctly we will get a strong grip edge of the glass or plastic.


Profile is dedicated to Krav cap 56 consisting of two overlapping parts. They should be installed separately on the profiles of Krav-D56 and Krav-Z56. They make it possible to mask the gap results when the mounting profiles on thicker panes. It can be installed both before and after the application of profiles on the sheet. The installation of these caps is very useful, as well they protect the profile against the ingress of dust and other unwanted elements that can contaminate the entire structure and lead to the deterioration of its light parameters. At the time of their installation should be very careful not to damage the delicate hooks, which break will prevent proper assembly. Profile KRAV-Z56 should be inserted into the profile KRAV-D56 starting from one end, but not by setting the entire length of the profile parallel. To give the correct patch cord Silicone slip, apply silicone lubricant, liquid soap or any other dedicated for this purpose liquid.

Fixing or suspending the sheet must be made using the necessary elements that can easily be found on our website. They are available in section "Accessories".

It should take into account that the possible removal may cause damage to the profiles. You can try it easier taping panes only profile Krav-D56, a second profile Krav-Z56 does not attach by means of the adhesive tape.


We invite you to familiarize yourself with our offer.

KRAV 56 Łatwy montaż diod Easy Installation of LEDs Einfache Installation von LEDs 116



KRAV 56 PROFIL	dlugość length Länge	szerokość paska LED LED strip width Breite LED Band	wykończenie powierzchni surface finish Oberfläche	numer artykułu article number Artikelnummer
	1m (standard) 2m (standard) 3m *	1 x LED strip max. 6 mm	anodowany anodized eloxiert	18017

KRAV- ZAŚLEPKA / END CAP / ENDKAPPE

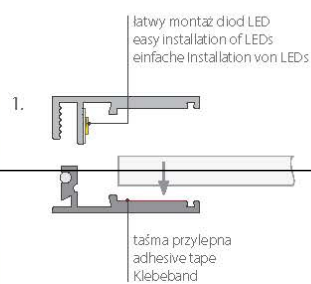


0.5 / Profile do podświetlania krawędzi szyb, tworzyw / Extrusions for edge lighting of glass, plastic / Profile fuer Glasskantenbeleuchtung

KRAV-56

PL / **Profil służący do krawędziowego podświetlania szyb** lub innych tafli przezroczystych o grubości 5-6 mm.

EN / **An extrusion used for edge illumination of glass** and other transparent panels of 5-6 mm thickness.

DE / **Das Profil zur Randbeleuchtung von den Scheiben** oder anderen transparenten Flächen von der Dicke von 5-6 mm.

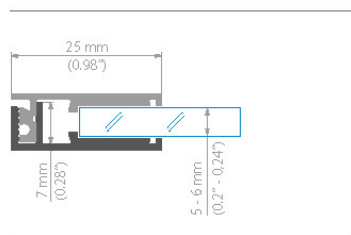

KRAV-56

dlugość length Länge	szerokość paska LED LED strip width Breite LED Band	wykończenie powierzchni surface finish Oberfläche	numer artykułu article number Artikelnummer
1m (standard) 2m (standard) 3m (standard) 3-6m *	1 x LED strip max. 6 mm	● anodowany / anodized / eloxiert	18017ANODAZM

* Na specjalne zamówienie / Special order / Sonderbestellung.

ZAŚLEPKI / END CAP / ENDKAPPEN



KRAV-56 KPL.


zaślepka podstawowa / basic end cap / Endklappe

PS



jasno szara / light gray / hellgrau

24032

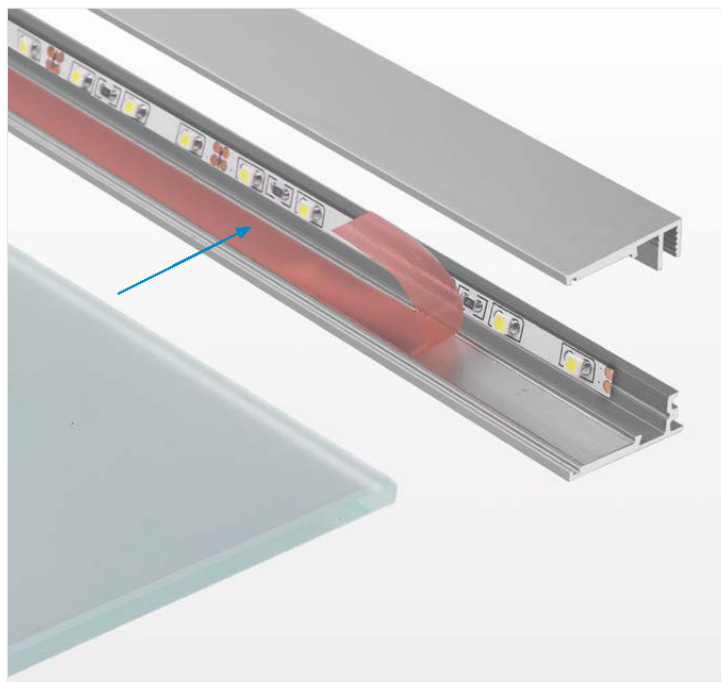

ŁATWY MONTAŻ LED

Na kompletny profil KRAV 56 składają się dwa profile: jeden przystosowany do montażu pasmów LED oraz drugi profil zamykający. Ponadto profile wyposażone są w mocującą taśmę przyklepną oraz sznur silikonowy zapewniający dobre połączenie obydwu profili. UWAGA! Profil KRAV-56 nie jest profilem konstrukcyjnym! Służy wyłącznie do podświetlania tafli ze szkła lub tworzywa. Montaż, mocowanie lub podwieszenie tafli należy dokonać przy użyciu standardowych mocowań dostępnych na rynku.

SIMPLE LED MOUNTING

The complete KRAV 56 extrusion is composed of two extrusions: one adapted for mounting LED strips and the second acting as a closing extrusion. Moreover, the extrusions are equipped with an adhesive mounting tape and a silicone cord ensuring good connection of both extrusions. NOTE! KRAV-56 extrusion is not a construction extrusion! It is used for illumination of glass or plastic panels. Assembly, mounting or suspension of the panel must be executed using standard fastening available on the market.

EINFACHE LED MONTAGE

Das komplette Profil KRAV 56 besteht aus zwei Profilen: das eine, für Montage der LED Bänder geeignet ist und das zweite Schlussprofil. Darüber hinaus sind die Profile mit einem Klebeband und einer Silikonschnur ausgerüstet, der gute Verbindung von den beiden Profilen sicherstellt. ACHTUNG! Das Profil KRAV-56 ist kein Konstruktionsprofil. Es dient ausschließlich zur Beleuchtung der Flächen aus Glas oder Kunststoff. Die Montage, Befestigung oder das Aufhängen der Tafel mit den Standardbefestigungsstücken, die auf dem Markt erhältlich sind.


KRAV-56



KRAV-56



KRAV 56 Łatwy montaż diod / Easy Installation of LEDs / Einfache Installation von LEDs 116




KRAV 56 PROFIL	długość length Länge	szerokość paska LED LED strip width Breite LED Band	wykończenie powierzchni surface finish Oberfläche	numer artykułu article number Artikelnummer
	1m (standard) 2m (standard) 3m *	1 x LED strip max. 6 mm	anodowany anodized eloxiert	18017

KRAV - ZAŚLEPKA / END CAP / ENDKAPPE




LED Profile

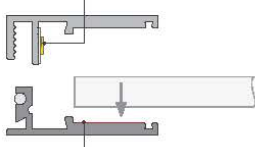


- 

łatwy montaż diod LED
easy installation of LEDs
einfache Installation von LEDs

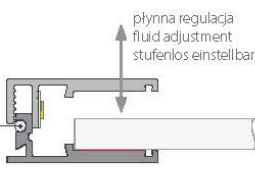taśma przylepna
adhesive tape
Klebeband
- 

płynna regulacja
fluid adjustment
stufenlos einstellbar

sznur silikonowy
silicon string
Silikonstreifen
- 

5 - 6 mm
0.2" - 0.24"

* Dostępne po uzgodnieniu z działem handlowym / Available by arrangement with the sales department /
verfügbar nach Absprache mit dem Vertrieb

