

Link to the product: <https://stair-lighting.com/profiel-led-opk-4-c0370-p-2205.html>

Profiel LED OPK-4 - C0370

Price	9.80 Euro
Availability	Available
Shipping time	5 days
Number	2205
Manufacturer	KLUS

Product description

Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process.

[The details of the shipping method and packaging of the aluminum profiles you will find here \(click in the link\)](#)

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab.

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".

If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.


For each country is different maximum length of the profile that we can send. It does not depend on us only by courier.

We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.

Profile architektoniczne /
Architekturprofile

OPK-4

REF. C0370



profil / Profil

długość / Länge	szerokość LED / LED-Breite	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m	13 mm	● Srebrny anodowany / Silber eloxiert	C0370ANODA_1
2 m			C0370ANODA_2
3 m			C0370ANODA_3


akcesoria / Zubehör

osłony mleczne / opale Abdeckungen	osłony przezroczyste / transparente Abdeckungen	zawieszki / Befestigungen	łączniki / Verbindungsstücke
KA 17035	KA 17036	UCHO-ZM 42512	ZM-180 42717
KA-COM 17121	KA-COM 17122	PUSZ-PRET-ZM 42250	ZM-90 42716
PDS-LUK 17076	HS 1370	PUSZ-LIN-ZM 42256	ZM-120 42728
LIGER 17037	KA-PRO 17065	FI-10-ZM-P 42244	ZM-135 42720
HS 1369	osłony czarne / schwarze Abdeckungen	FI-10-ZM-W 42242	ZM-PION-90 42718
KA-PRO 17064		zestawy mocowań / Befestigungssätze	ZM-PION-135 42719
zaślepki szare / graue Endkappen	sprężyny mocujące / Befestigungsfedern	RG-1 42648	profil / Profil
OPK-4 24238	GP 00293	RG-1 42647	TPK-4 18044
		RD-1 42650	
		RD-1 42649	

Architectural extrusions /
Perfiles arquitectónicos

OPK-4

REF. C0370



extrusion / perfil

length / longitud	space for LED strip / espacio para tira de LED	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m			C0370ANODA_1
78.7" / 2 m	0.5" / 13 mm	● Silver anodized / Ánodo de plata	C0370ANODA_2
118" / 3 m			C0370ANODA_3

accessories / accesorios

frosted covers / difusores escarchadas	clear covers / difusores transparentes	fastener / soportes	connectors / conectores
KA 17035	KA 17036	UCHO-ZM 42512	ZM-180 42717
KA-COM 17121	KA-COM 17122	PUSZ-PRET-ZM 42250	ZM-90 42716
PDS-LUK 17076	HS 1370	PUSZ-LIN-ZM 42256	ZM-120 42728
LIGER 17037	KA-PRO 17065	FI-10-ZM-P 42244	ZM-135 42720
HS 1369		FI-10-ZM-W 42242	ZM-PION-90 42718
KA-PRO 17064	black covers / difusores negro		ZM-PION-135 42719
	LIGER 17040	mounting sets / sets de montaje	
grey end caps / tapas finales gris	mounting springs / resortes de montaje	RG-1 42648	extrusions / perfiles
OPK-4 24238	GP 00293	RG-1 42647	TPK-4 18044
		RD-1 42650	
		RD-1 42649	

The information contained in the description applies to the **PK-4 system** (a set of TPK-4 and OPK-4 profiles, and the PK-4 mounting bracket)

- Designed to reach an IP67 waterproof rating
- Easy LED service (assembly and disassembly OPK-4 extrusion „on click“)
- Line of light in the built-in lighting fixture without visible aluminum elements
- Can build fixtures going seamlessly from recessed to suspended
- Lighting fixtures can be combined to form lighting strings (ZM connectors)
- The standard TPK-4 profile comes with a “foam technical cover” that facilitates “clean” mounting of the fixture in the drywall

Application

- for creating serviceable straight- and broken-line fixtures, built into drywall, flush with their surface, without visible aluminum flanges

Assembly

- the technical strip is mounted with elastic adhesives, used in drywall techniques, and the OPK-4 lighting fixture is snapped in with a mounting bracket
- it is recommended that you use:

Running meter	1 m	2 m	3 m
Mounting brackets	2	3	4

With lighting fixtures shorter than 1 m, use at least 2 mounting brackets.

Additional information

- possibility of making a linear fixture with IP67 protection, which means the fixture is dustproof and waterproof
- it replaces the old TE-4 system
- OPK-4 system includes a mounting bracket and the TPK-4 protective insert, which protects essential elements against soiling during assembly
- the ability to build polygonal fittings using ZM connectors
- space for LED strip: 12.8 mm

Profile bending

Minimum internal radius	Minimum external radius
300 mm	300 mm


- minimum radius- bending radius which when exceeded causes destruction (deformation, bending or lack of compatibility with other accessories, e.g. covers, end caps, etc.) of the profile
- internal radius- refers to the profile bent so that the cover is facing the inside of the arch
- external radius - refers to the profile bent so that the cover is facing the outside of the arch
- irregular curves are possible after consultation and individual quotation
- when bending anodized profiles, one should be aware of cracking of the anode coating (which may be more or less visible depending on the radius)







PROFIL TPK-4
18044NA

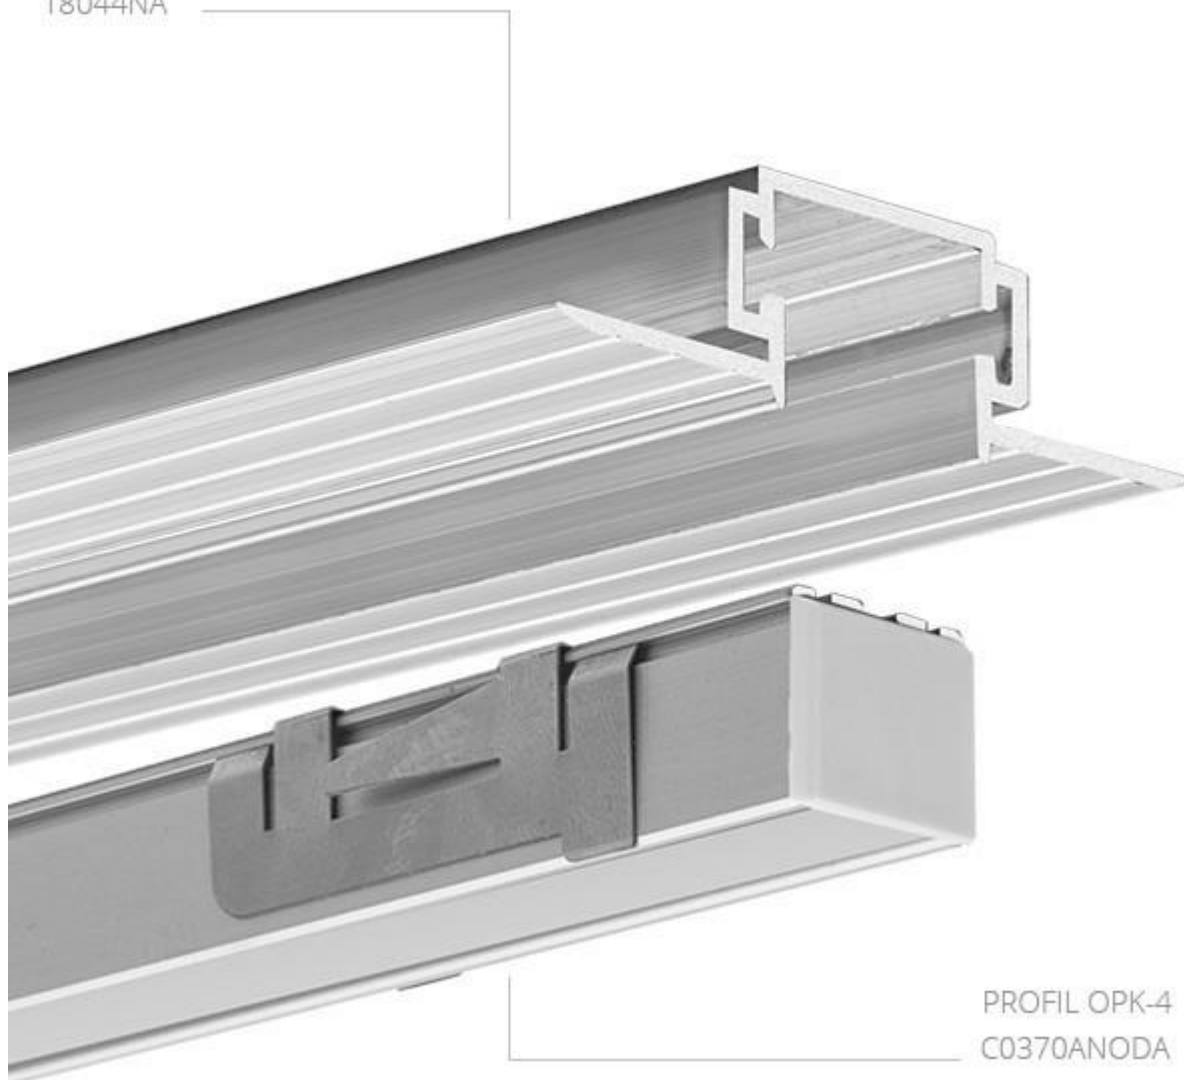

PROFIL OPK-4
C0370ANODA

