

Link to the product: <https://stair-lighting.com/profiel-led-pac-alu-anodized-p-624.html>

## Profiel LED PAC-ALU anodized

Price	<b>8.56 Euro</b>
Availability	<b>Available</b>
Shipping time	<b>3 days</b>
Number	<b>624</b>
Manufacturer	<b>KLUS</b>

### Product description

#### Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process.

[The details of the shipping method and packaging of the aluminum profiles you will find here \(click in the link\)](#)

set: profile without cover

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab.

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".

If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.

For each country is different maximum length of the profile that we can send. It does not depend on us only by courier.

We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.

Profile kątowe /  
Winkelprofil

## PAC-ALU

REF. B4370




Prosta konstrukcja.  
Estetycznie wykończenie narożników wewnętrznych.

### PRZEZNACZENIE PRODUKTU:

- do budowy oświetlenia w gablotach, witrynach sklepowych i na ekspozycjach. Do osadzania we wpustach i w wewnętrznych narożnikach 90°.

### MONTAŻ:

- za pośrednictwem kleju montażowego lub odpowiednio dobranych wkrętów.



Einfacher Aufbau.  
Ästhetischer Finish von Innenecken.

### ANWENDUNG

- zur Montage der Beleuchtung in Schaukasten, Schaufenstern und in Ausstellungen. Zum Einbau in Nuten und in 90° Innenecken

### MONTAGE

- mit Montagekleber oder angepassten Schrauben

### profil / Profil

długość / Länge	szerokość LED / LED-Breite	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m	13 mm	● Srebrny anodowany / Silber eloxiert	<b>B4370ANODA_1</b>
2 m			<b>B4370ANODA_2</b>
3 m			<b>B4370ANODA_3</b>

### akcesoria / Zubehör

osłony mleczne / opale Abdeckungen	osłony przezroczyste / transparente Abdeckungen	zaślepki szare / graue Endkappen	inne akcesoria / sonstiges Zubehör
KA-12 <b>17078</b>	KA-12 <b>17079</b>	PAC-ALU <b>00084</b>	DŁAWNICA 8.8X1.2 / KABELVERSCHRAU- BUNG 8.8X1.2 <b>00802</b>
HS-12 <b>00157</b>	HS-12 <b>00158</b>		
KA-PRO-12 <b>17066</b>	KA-PRO-12 <b>17067</b>		



Angle extrusions /  
Perfiles angulares

## PAC-ALU

REF. B4370




Simple design.  
Internal corners with appealing finish.

### APPLICATION

- for construction of lighting in showcases, shop windows and displays.
- in grooves and internal 90° corners.

### ASSEMBLY

- with mounting adhesive or appropriately selected screws.



Diseño simple.  
Esquinas internas con acabado atractivo.

### APLICACIÓN

- para la construcción de iluminación en vitrinas, escaparates y exhibidores.
- en ranura y esquinas internas de 90°.

### MONTAJE

- con adhesivo de montaje o tornillos seleccionados apropiadamente.

### extrusion / perfil

length / longitud	space for LED strip / espacio para tira de LED	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m	0.5" / 13 mm	● Silver anodized / Ánodo de plata	<b>B4370ANODA_1</b>
78.7" / 2 m			<b>B4370ANODA_2</b>
118" / 3 m			<b>B4370ANODA_3</b>

### accessories / accesorios

frosted covers / difusores escarchadas	clear covers / difusores transparentes	grey end caps / tapas finales gris	other accessories / otros accesorios
KA-12 <b>17078</b>	KA-12 <b>17079</b>	PAC-ALU <b>00084</b>	8.8x1.2 GLAND / GLÁNDULA <b>00802</b>
HS-12 <b>00157</b>	HS-12 <b>00158</b>		
KA-PRO-12 <b>17066</b>	KA-PRO-12 <b>17067</b>		

Profile PAC - ALU is angular profile, which is made of high-grade, double anodized aluminum. Double anodizing makes profile is highly resistant to corrosion processes, and to damage that could affect the profile as a result of its use. Profile to the tapes and strips equipped with LED light source, whose width is not greater than 12.8 mm.


Profile PAC - ALU with LED light sources usually is used primarily in lighting design, in particular cabinets, windows, shelves, cabinets, drawers, store displays, as well as accent lighting in niches placed ceilings or in other places chosen by customers. Lighting is by far diversifies the interior and adds to the character. As a result, it is possible to seal the housing profile, so that it is resistant to all kinds of weather conditions, it can be used to illuminate the exterior architectural elements, including building facades, gardens, statues, fountains and many others.

Diodes should override specially dedicated to this end cover type K12 or HS12 (either version milky or transparent). All covers are made of polycarbonate, and in addition cover type HS12 received a certificate that guarantees perfect resistance to sun, rain and other weather factors, UV and flammability.

Installation of the profile is very easy and simple to carry out, very easily carry it even a person with no experience. The profile is attached to the substrate using the public market assembly adhesive or screws that guarantee easy and reliable assembly. For those interested, it is worth noting that there is a possibility of the luminaire, which is characterized by high tightness and its class of resistance against the penetration of all kinds of solids, dust and water will be IP 67.

Profile PAC - ALU dedicated additional polypropylene caps, which, like other accessories designed to complement the profile can be found on our website under "Accessories". Covers should be used in order to protect the profile against the ingress of dust to him and other undesirable elements (and thus extend its suitability for use), as this could result in contamination LED strip, which is worsening the correct lighting parameters.

We invite you to familiarize yourself with our offer.

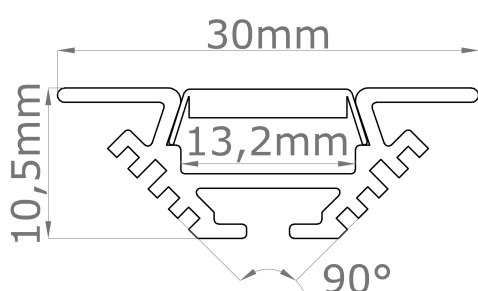


## PAC-ALU

PL / **Profil dla podświetleń korpusów szafek, półek, gablot, witryn sklepowych itp.** Uniwersalne zastosowanie.

EN / **An extrusion for illuminating the insides of cupboards, shelves, cabinets, shop showcases etc.** Universal use.

DE / **Das Profil zur Beleuchtung von Schränken, Regalen, Vitrinen, Schaufenster usw.** Universelle Anwendung.

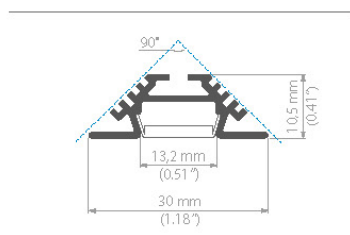

### PAC-ALU

dlugość length Länge	szerokość paska LED LED strip width Breite LED Band	wykończenie powierzchni surface finish Oberfläche	numer artykułu article number Artikelnummer
1m (standard) 2m (standard) 3m (standard) 3 - 6m *	1 x LED strip max. 10,8 mm	● anodowany / anodized / eloxiert	B4370ANODA

\* Na specjalne zamówienie / Special order / Sonderbestellung.

akcesoria / accessories / zubehör

OSŁONKI / COVERS / ABDECKUNGEN

	K-12	łatwy montaż / easy to assemble / einfach zu montieren	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	00155
					przezroczysta / transparent	00156
	KA-12-v1	łatwy montaż / easy to assemble / einfach zu montieren	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17078
					przezroczysta / transparent	17079
	KA-BIS-12	łatwy montaż, dobre rozpraszanie światła / easy to assemble, very good light dispersion / einfach zu montieren sehr gute Lichtstreuung	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17073
					przezroczysta / transparent	17074
	HS-12	certyfi kat UV, dobra klasa ognioodporności / UV certificate, good class of refractory-resistance / UV-Zertifikat, gute Feuerwiderstandsklasse	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	00157
					przezroczysta / transparent	00158


ZASŁĘPKI / END CAP / ENDKAPPEN

	PAC-ALU	zaśleпка podstawowa / basic end cap / Endkappe	PP		jasno szara / light gray / hellgrau	000100
---	---------	--	----	---	-------------------------------------	--------





PAC-ALU

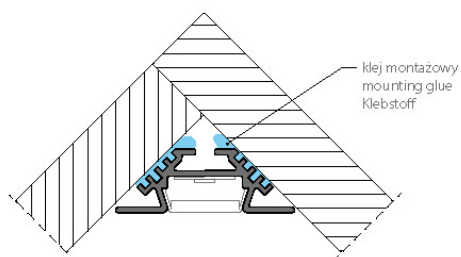

#### PROFIL KĄTOWY


Profil kątowy znajduje zastosowanie głównie do oświetlenia wnętrza, w szczególności do podświetlenia mebli (szafek, szuflad, półek) a także do podświetlenia gablot i ekspozycji.

#### ANGLE EXTRUSION

The angle extrusion may be used mainly for interior lighting, in particular for illumination of furniture (cupboards, drawers, shelves) as well as to illuminate cabinets and exhibitions.

#### WINKELPROFIL

Das Winkelprofil wird hauptsächlich für die Innenbeleuchtung eingesetzt, vor allem für Möbelbeleuchtung (Schränke, Schubladen, Regale) und auch für Vitrinen und Ausstellungen.

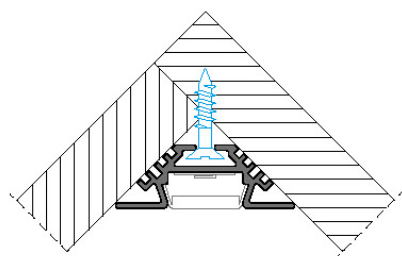

## PAC - ALU

65

