


Link to the product: <https://stair-lighting.com/profiel-led-tan-c5-p-725.html>

## Profiel LED TAN-C5

Price	<b>5.89 Euro</b>
Availability	<b>Available</b>
Shipping time	<b>3 days</b>
Number	<b>725</b>
Manufacturer	<b>KLUS</b>

### Product description

#### Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process.

[The details of the shipping method and packaging of the aluminum profiles you will find here \(click in the link\)](#)

non-anodized

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab.

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".

If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.

For each country is different maximum length of the profile that we can send. It does not depend on us only by courier.

We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.

Profil kątowy /  
Winkelprofil

## TAN-C5

REF. B5391



Profil kieruje światło pod kątem 45 stopni.  
Niska waga.

### PRZEZNACZENIE PRODUKTU:


- do budowy opraw oświetleniowych kierunkowych. Do osadzania na płaszczyznach i w wewnętrznych narożnikach 90°.

### MONTAŻ:

- za pomocą mocownika 45-STN, profesjonalnych taśm dwustronnie przylepnych i klejów montażowych.

### DODATKOWE INFORMACJE:

- osłonka o uproszczonej konstrukcji.



Leuchtwinkel 45 Grad.  
Geringes Gewicht.

### ANWENDUNG

- zur Montage von Richtungsleuchten; auf Flächen und in 90° Innenecken

### MONTAGE

- mit Befestigungsclips 45-STN, professionellen doppelseitigen Klebändern und Montageklebern

### ZUSÄTZLICHE INFORMATIONEN

- abdeckung mit vereinfachter Struktur

### profil / Profil

długość / Länge	szerokość LED / LED-Breite	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m	10 mm	Nieanodowany (surowe aluminium) / Nicht eloxiert (Aluminum Natur)	<b>B5391NA_1</b>
2 m			<b>B5391NA_2</b>
1 m		Srebrny anodowany / Silber eloxiert	<b>B5391ANODA_1</b>
2 m			<b>B5391ANODA_2</b>


### akcesoria / Zubehör

osłony mleczne / opale Abdeckungen	główce / Köpfe	mocowniki / Befestigungsclips	zawieszki / Befestigungen	
T <b>17004</b>	45-ST <b>42210</b>	45-STN <b>24144</b>	DP-45-MOC	<b>00652</b>
zaślepki białe / weisse Endkappen	45-ZO <b>42211</b>	45 <b>24265</b>	DP-45-MOC-ZO	<b>00653</b>
	45-ZZ <b>42212</b>		DP-45-MOC-ZZ	<b>00654</b>
	BZP <b>42213</b>			
	BZP-ZO <b>42214</b>			
TAN-C5 <b>20052</b>	BZP-ZZ <b>42215</b>			

Angle extrusions /  
Perfiles angulares

## TAN-C5

REF. B5391

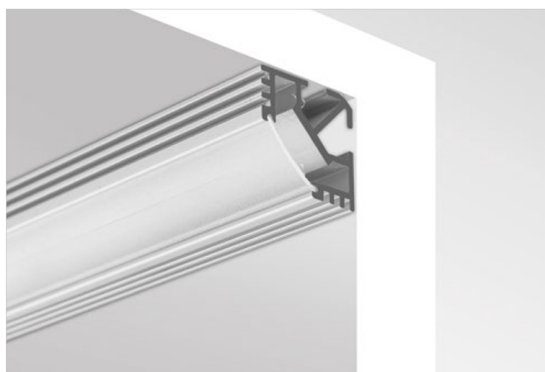

The extrusion directs the light at a 45° angle.  
Economical T-cover with a simplified design.  
Low weight.

### APPLICATION


- for construction of directional lighting fixtures.
- for mounting on surfaces and in internal 90° corners.

### ASSEMBLY

- with a 45-STN mounting bracket, professional double-sided adhesive tapes and mounting adhesives.

### ADDITIONAL INFORMATION

- cover with simplified construction.

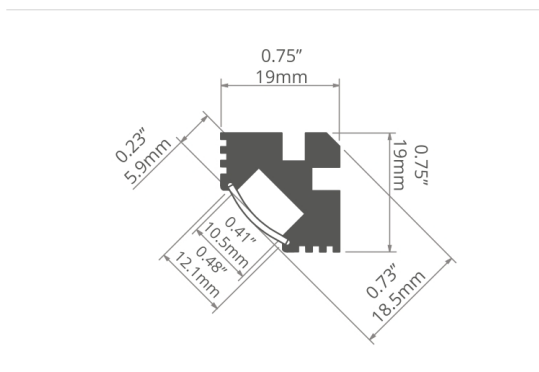

El perfil dirige la luz en un ángulo de 45°.  
Difusor "T" económico de estructura sencilla.  
Liviano.

### APLICACIÓN

- para la construcción de luminarias direccionales.
- para montaje en superficies y en esquinas interiores de 90°.



### MONTAJE

- con un soporte de montaje 45-STN, cintas adhesivas profesionales de doble cara y adhesivos de montaje.

### INFORMACIÓN ADICIONAL

- difusor con construcción simplificada.

### extrusion / perfil

length / longitud	space for LED strip / espacio para tira de LED	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m	0.39" / 10 mm	 Non anodized (raw) / Aluminio crudo (no anodizado)	<b>B5391NA_1</b>
78.7" / 2 m			<b>B5391NA_2</b>
39.4" / 1 m		 Silver anodized / Ánodo de plata	<b>B5391ANODA_1</b>
78.7" / 2 m			<b>B5391ANODA_2</b>

### accessories / accesorios

frosted covers / difusores escarchadas	heads / cabezales	mounting brackets / soporte de montaje	fasteners / soportes
T <b>17004</b>	45-ST <b>42210</b>	45-STN <b>24144</b>	DP-45-MOC <b>00652</b>
white end caps / tapas finales blanco	45-ZO <b>42211</b>	45 <b>24265</b>	DP-45-MOC-ZO <b>00653</b>
TAN-C5 <b>20052</b>	45-ZZ <b>42212</b>		DP-45-MOC-ZZ <b>00654</b>
	BZP <b>42213</b>		
	BZP-ZO <b>42214</b>		
	BZP-ZZ <b>42215</b>		

Profile angle TAN-C5 is made of high-quality aluminum (also available in a version of the double-anodized, which is perfectly resistant to corrosion and mechanical damage that occur during use). Stainless steel and lightweight aluminum makes the profile perfectly captures the heat, so you do not overheat. Profile to soft or hard strip with the LED light sources to a width not exceeding 12mm.

It is recommended to put in strips LED, override special transparency - opaque cover (T) made of polypropylene. The casing is mounted on a so-called. "Click" or can be inserted from the side. Surface casing has a soft satin structure, making it virtually preserves transparency. If necessary it can be used casings in two sections and connect them ends "butt".

Profile angle of the LED light sources is most often used in interior lighting, mainly in lighting cabinets, stairs, windows, as well as accent lighting in niches ceilings. Small size compared to other models profiles enable terminal mount all of the furniture, which was previously impossible. Profile is also suitable for applications in the construction and landscape architecture. Perfectly suited for installation in the ground plane sidewalks, traffic routes, bicycle paths, driveways and parking lots. The design of the profile when used in areas intended for vehicles provides for standard load and maintenance.

The great advantage of the profile types are simple assembly with the participation of special fasteners or adhesive tape. Mounting profile to the ground taking place using double-sided tape or mocownika guarantees simple and stable mounting surface not entirely flat. There is also a possibility to select the frame: transparent or milky.

Profile are dedicated (as accessory) standard polypropylene caps and brackets for. Accessories are made of galvanized steel or chrome-plated steel. Covers are designed to protect against the ingress profile to him, dust and other undesirable elements that could contaminate the LED strip and worsen the current lighting parameters. All the necessary elements for the expansion of the profile without any problem can be found on our website under "Accessories".

We invite you to familiarize yourself with our offer.

Material: Aluminum

Cover: Matt T (choice in accessories)

Length: 1m

Fixing: Mechanical or tape

Certificate: CE

Advantages:

- Simple installation types: mechanical with fasteners or adhesive tape (accessories)
- Small size compared to other models allow the strips mounted on all furniture
- Stainless steel and lightweight aluminum
- Well it releases the heat
- The possibility of choosing Frame: transparent or milky
- The original formula
- Product Polish and with CE approval
- Expandable and attach accessories (caps, power supplies)

Purpose:

- to illuminate the LED, the strips of soft or hard
- for use in construction, landscape architecture
- to be installed in the plane of the substrate sidewalks, traffic routes, bicycle paths, driveways, parking lots
- to be installed in the plane of cobblestones: driveways, parking lots
- construction of the profile when used in areas intended for vehicle loads and provides standard maintenance and operations
- utilities



0.2 / Profile kątowe / Angle extrusions / Winkelprofil

## TAN-C5

PL / **Atrakcyjna cena.**  
Odpowiednik profilu 45-ALU.

EN / **Attractive price.**  
Equivalent of 45 - ALU extrusion.

DE / **Attraktiver Preis.**  
Das Äquivalent vom Profil 45-ALU.

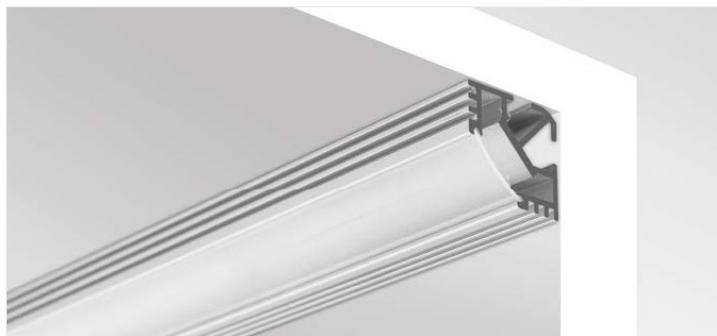

### TAN-C5

dlugość length Länge	szerokość paska LED LED strip width Breite LED Band	wykończenie powierzchni surface finish Oberfläche	numer artykułu article number Artikelnummer
1m (standard) 2m (standard) 3m (standard) 3 - 6m *	1 x LED strip max. 10,8 mm	● nieanodowany (surowe aluminium) / non anodized (raw - aluminum) / nicht eloxiert (Aluminium Natur)	B5391NA
		● anodowany / anodized / eloxiert	B5391ANODA



\* Na specjalne zamówienie / Special order / Sonderbestellung.

akcesoria / accessories / zubehör


OSŁONKI / COVERS / ABDECKUNGEN


	T	łatwy montaż / easy to assemble / einfach zu montieren	1m, 2m (standard)	PP	mleczna / frosted / opak	17004
---	---	--	-------------------	----	--------------------------	-------

ZAŚLEPKI / END CAP / ENDKAPPEN

	TAN-CS	zaślepka podstawowa / basic end cap / Endkappe	PS		biała / white / weiss	20052
---	--------	--	----	---	-----------------------	-------

AKCESORIA MONTAŻOWE / MOUNTING ACCESSORIES / MOUNTING ACCESSORIES

	45-STN		stal sprężynowa, nierdzewna / spring steel, stainless steel / Federstahl, Edelstahl	24144
	45-ALU	mocownik / mounting bracket / Befestigungsclip	ocynk / zinc / verzinkt	1399
	45-ALU		chrom mat. / chrome matte / matt verchromt	1455

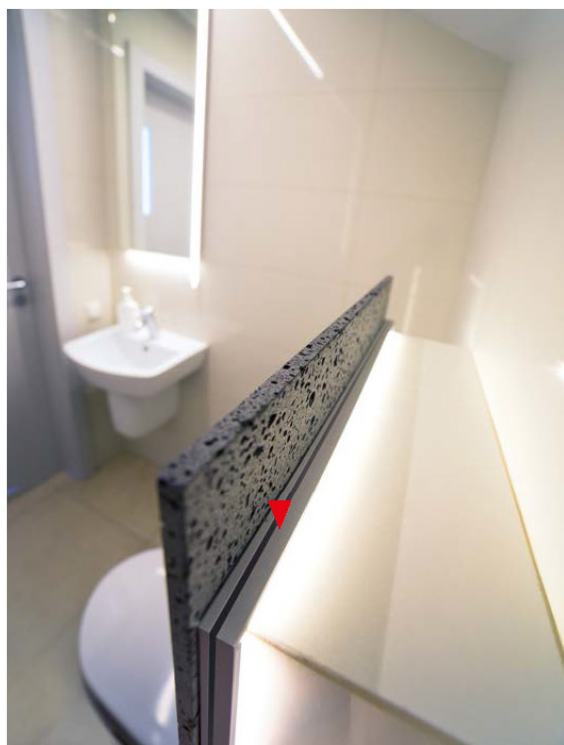

## TAN-C5 Profil ekonomiczny Economical profile Wirtschaftliches Profil

38



TAN-C5 PROFIL	dlugość length Länge	szerokość paska LED LED strip width Breite LED Band	wykończenie powierzchni surface finish Oberfläche	numer artykułu article number Artikelnummer
	1m 2m	1 x LED strip max. 12 mm	nieranodowany (surowe aluminium) non anodized (raw - aluminum) nicht eloxiert (Aluminum Natur)	B5391
			anodowany anodized eloxiert	B5391ANODA

### OSŁONKA / COVER / ABDECKUNG

T


1m (standard)  
2m (standard)

przezroczysta matowa  
transparent matte  
opak

łatwy montaż  
easy to assemble  
einfach zu montieren

17004

### TAN-C5 - ZAŚLEPKA / END CAP / ENDKAPPE

20052



LED Profile



