

Link to the product: <https://stair-lighting.com/profiel-led-tepiko-p-2284.html>

Profiel LED TEPIKO

Price	11.52 Euro
Availability	Available
Shipping time	5 days
Number	2284
Manufacturer	KLUS

Product description

Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process.

[The details of the shipping method and packaging of the aluminum profiles you will find here \(click in the link\)](#)

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab.

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".

If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.


For each country is different maximum length of the profile that we can send. It does not depend on us only by courier.

We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.

Profile architektoniczne /
Architekturprofile

TEPIKO

REF. 18046

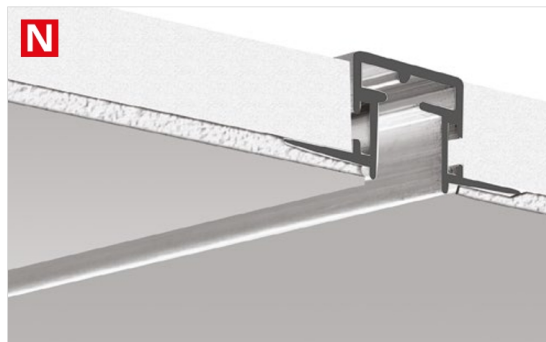

Możliwość budowy opraw płynnie przechodzących od wbudowanej do podwieszanej.

Bardzo mały gabaryt.

Łatwy serwis LED.

Mieści się w grubości płyty gipsowo-kartonowej (12 mm).

Możliwość łączenia opraw w ciągi świetlne (ŁĄCZNIKI ZM).

Profil TEPIKO jest wyposażony w standardzie we „wkładkę ochronną TEPIKO”, która ułatwia „czysty” montaż oprawy w płycie gipsowo-kartonowej.

PRZEZNACZENIE PRODUKTU:


- do budowy serwisowalnych opraw LED, prostych i łamanych, wbudowanych i podwieszonych, charakteryzujących się efektem „cienkiej linii światła”.

MONTAŻ:

- profil TEPIKO montuje się w gips-kartonie na kleje elastyczne,

DODATKOWE INFORMACJE:

- zaleca się stosować:
Długość profilu: 1 m, 2 m, 3 m
Ilość zatrzasków TEKNIK: 4, 9, 14,
- profil TEPIKO sprzedawany jest z „wkładką ochronną TEPIKO”.

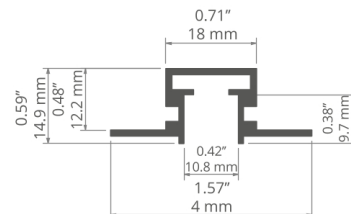

Möglichkeit, Leuchten zu bauen, die nahtlos vom einer Einbauleuchte in eine Hängeleuchte übergehen.

Sehr klein.

Einfacher LED-Service.

Passt in Gipskartonplattenstärke (12 mm).

Möglichkeit, Leuchten in durchgehende Linien zu verbinden (ZM Verbindungsstücke).

Das TEPIKO Profil ist serienmäßig mit der "TEPIKO Schutzeinlage" ausgestattet, die den "sauberen" Einbau der Leuchte in Gipskartonplatten erleichtert.

ANWENDUNG

- die in der Beschreibung enthaltenen Informationen gelten für das PIKO-ZM System (Satz von PIKO-ZM und TEPIKO Profilen)

MONTAGE

- das TEPIKO Profil wird in Gipskarton mit flexiblen Klebstoffen befestigt

ZUSÄTZLICHE INFORMATIONEN

- es wird empfohlen zu verwenden:
Profillänge: 1 m, 2 m, 3 m
Anzahl der TEKNIK Einraster TEKNIK: 4, 9, 14
- das TEPIKO Profil wird mit der „TEPIKO Schutzeinlage“ verkauft

profil / Profil

długość / Länge	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m	Nieanodowany (surowe aluminium) /	18046NA_1
2 m	● Nicht eloxiert	18046NA_2
3 m	(Aluminum Natur)	18046NA_3


akcesoria / Zubehör

zaślepki szare / graue Endkappen	inne akcesoria / sonstiges Zubehör	profil / Profil
TEPIKO 24303	ZATRZASK TEKNIK / TEKNIK EINRASTER 24003	PIKO-ZM C1168

Architectural extrusions /
Perfiles arquitectónicos

TEPIKO

REF. 18046

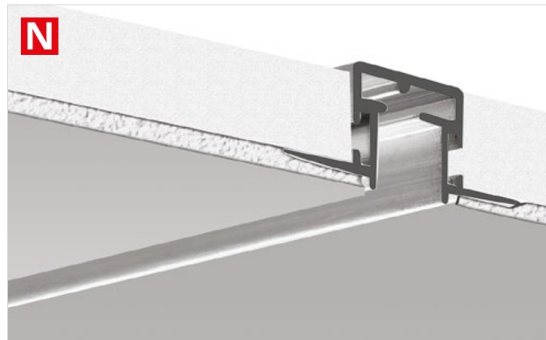

Very small size.

Easy LED service.

Be used in the thickness of a drywall board
(0.47" / 12 mm).

Can build light strings (with ZM connectors).

Can be used to mount fixtures going seamlessly
from recessed to suspended.

TEPIKO features a "TEPIKO protective insert", which
facilitates clean mounting of the fixture in drywall boards.

APPLICATION


- for construction of serviceable LED lighting fixtures, straight and angled, recessed and suspended, producing the effect of a "thin line of light".

ASSEMBLY

- TEPIKO is mounted in drywall boards using elastic fixing glues.
- the "built-in" PIKO-ZM is mounted in the TEPIKO extrusion with the TEKNIK latch (sold separately).
- the "suspended" PIKO-ZM is mounted using other accessories dedicated to the "small lock".

ADDITIONAL INFORMATION

- recommendation:
extrusion length: 39.4" / 1 m, 78.7" / 2 m, 118" / 3 m
number of TEKNIK latches: 4, 9, 14.
- the TEPIKO extrusion is sold with the "TEPIKO protective insert".

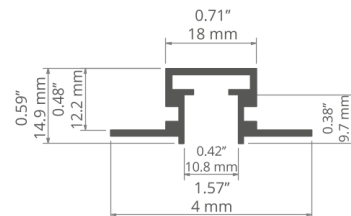

Tamaño muy pequeño.

Fácil servicio LED.

Se adapta al espesor de una placa de paneles de yeso
(0.47" / 12 mm).

Puede construir cadenas de luz (con conectores ZM).

Puede construir luminarias que van sin problemas
de incorporados a suspendidos.

TEPIKO cuenta con un „inserto protector TEPIKO“, que
facilita el montaje limpio del accesorio en placas de yeso.

APLICACIÓN

- para la construcción de luminarias LED reparables, rectas y en ángulo, incorporadas y suspendidas, produciendo el efecto de una „delgada línea de luz“.


MONTAJE

- TEPIKO se monta en placas de paneles de yeso utilizando pegamentos de fijación elásticos.
- el PIKO-ZM „incorporado“ está montado en la extrusión TEPIKO con el pestillo TEKNIK.
- el PIKO-ZM „suspendido“ se monta con otros accesorios dedicados a la „cerradura pequeña“.

INFORMACIÓN ADICIONAL

- recomendación: longitud del perfil: 39.4" / 1 m, 78.7" / 2 m, 118" / 3 m, número de pestillos TEKNIK: 4, 9, 14.
- la extrusión TEPIKO se vende con „el TEPIKO difusor de protección „ y pestillos TEKNIK.

extrusion / perfil

length / longitud	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m	 Non anodized (raw) / Aluminio crudo (no anodizado)	18046NA_1
78.7" / 2 m		18046NA_2
118" / 3 m		18046NA_3

accessories / accesorios

grey end caps / tapas finales gris	other accessories / otros accesorios	extrusion / perfiles
TEPIKO 24303	TEKNIK LATCH / CLIP 24003	PIKO-ZM C1168

The information contained in the description applies to the PIKO-ZM system (a set of PIKO-ZM and TEPIKO profiles)

- Can build fixtures going seamlessly from built-in to suspended ones
- Very small size
- The PIKO-ZM lighting fixture is bendable
- Easy LED service
- Fits in the thickness of a drywall board (12mm)
- Can build light strings (with ZM connectors)
- TEPIKO features a "TEPIKO protective insert", which facilitates clean mounting of the fixture in drywall boards

The information contained in the description applies to the PIKO-ZM system (a set of PIKO-ZM and TEPIKO profiles)

- Can build fixtures going seamlessly from built-in to suspended ones
- Very small size
- The PIKO-ZM lighting fixture is bendable
- Easy LED service
- Fits in the thickness of a drywall board (12mm)
- Can build light strings (with ZM connectors)
- TEPIKO features a "TEPIKO protective insert", which facilitates clean mounting of the fixture in drywall boards

