

Link to the product: https://stair-lighting.com/profile-led-kides-duo-with-space-for-power-supply-p-1933.html



Profile LED KIDES DUO with space for power supply

Price	52.00 Euro
Availability	Available
Shipping time	4 days
Number	1933
Manufacturer	KLUS

Product description

Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process. The details of the shipping method and packaging of the aluminum profiles you will find here (click in the link)

Profile for the construction of wall fixtures (sconce fixtures), with an option of simultaneous up and down lighting. It has integrated functions: fitting of LEDs and protecting them with a cover (diffuser), surface mounting, as well as an option of installation of power supply and other electronic components, profiles length 100, 200 cm.

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".

If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.

For each country is different maximum length of the profile that we can send. It does not depend on us only by courier. We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.



Profile z komorą na zasilacz / Profile mit Raum für Netzgeräte

KIDES-DUO

REF. 18032



4.02" 102.1mm 0.91" 1.5" 49.1mm 23mm 34.8mm 0.81" 2.36" 43.7mm 60mm 146mm 0.91" 1:2

Możliwość uzyskania linii światła.

Oprawa o klasie szczelności IP54 bez konieczności stosowania mas uszczelniających.

Prosta konstrukcja.

Przestrzeń na zasilacz, elementy elektroniczne i przyłącze elektryczne.

PRZEZNACZENIE PRODUKTU:

do budowy "bryzgo-szczelnych" opraw kinkietowych, świecących w dwóch kierunkach, o dużej wydajności światła.

MONTAŻ:

za pomocą listwy montażowej, przytwierdzonej wkrętami odpowiednio dobranymi do rodzaju podłoża.

DODATKOWE INFORMACJE:

- do zastosowań zewnętrznych i wewnętrznych,
- dobre odprowadzenie ciepła,
- ATRA: dostępna aluminiowa przesłona maskująca źródło światła.



Lichtlinienfähig.

Leuchte mit Schutzart IP54 bedarf keiner Dichtmassen Einfacher Aufbau.

Raum für das Netzteil, den Stromanschluss und elektronische Komponenten.

ANWENDUNG

zur Montage "spritzdichter" Wandleuchten mit hoher Leuchtleistung,die in zwei Richtungen leuchten

mit einer Montageleiste, die mit an den Untergrund angepassten Schrauben angeschraubt wird

ZUSÄTZLICHE INFORMATIONEN

- für Innen- und Außenanwendungen
- gute Wärmeableitung ATRA: erhältlich ist eine Aluminiumabdeckung, die die Lichtquelle verdeckt

profil / Profil

długość / Länge	szerokość LED / LED-Breite	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m			18032ANODA_1
2 m	30 mm	Srebrny anodowany / Silber eloxiert	18032ANODA_2
3 m			18032ANODA_3

akcesoria / Zubehör

osłony mleczne / opale Abdeckungen

HS-22	17011
LIGER-22	17032V1
osłony przezroc transparente Ab	
HS-22	17022

osłony mrożone / transparent matt Abdeckungen

MUN-22	17042		
KIDES-DUO 17131			
zaślepki metalizowane / metallisierte Endkappen			
KIDES-DUO	42618		
KIDESIN-DUO	24153		

łączniki / Verbindungstücke

ZM-180	42717
ZM-90	42716
ZM-120	42728
ZM-135	42720
ZM-PION-90	42718
ZM-PION-135	42719

inne akcesoria /

sonstiges Zubeno	or
DŁAWNICA / KABELVERSCHR BUNG 24x1.6	AU- 00820
DŁAWNICA 8.8X KABELVERSCHR BUNG 8.8X1.2	
profil / Profil	
KIDES-DUO INSERT	B7827
ATRA	B7454






Extrusions with space for power supply / Perfiles con alojamiento para suministro de corriente

KIDES-DUO

REF. 18032





Possible to obtain a line of light.

IP54 protection class without the need for sealing. Simple design.

Large space for power supply, electronic components and electrical connection.

APPLICATION

- for construction of "splash-proof" wall lamps.
- emitting light in two directions.
- high light efficiency.

ASSEMBLY

using a mounting strip fastened with screws appropriately selected for the type of the surface.

ADDITIONAL INFORMATION

- wide range of end caps. for outdoor and indoor applications.
- good heat dissipation.
- aluminum screen masking the light source is available.
- various finishing of the screen is possible.



Capacidad de obtener una línea de luz.

Clase de la protección IP54 sin la necesidad de sellar. Diseño simple.

Gran espacio para el suministro de corriente, componentes electrónicos y conexión eléctrica.

APLICACIÓN

- para la construcción de lámparas de pared a prueba de salpicaduras.
- emitiendo luz en dos direcciones.
- alta eficiencia de la luz.

usando una tira de montaje fijada con los pernos seleccionados apropiadamente para el tipo de la superficie.

INFORMACIÓN ADICIONAL

- amplia gama de tapas de finale. para los usos afuera y de interior.
- buena disipación de calor.
- la pantalla de aluminio que enmascara el suministro de corriente es disponible.
- el vario acabamiento de la pantalla es posible.

extrusion / perfil

length / longitud	space for LED strip / espacio para tira de LED	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m			18032ANODA_1
78.7" / 2 m	1.18"/ 30 mm	Silver anodized / Ánodo de plata	18032ANODA_2
118" / 3 m			18032ANODA_3

frosted covers / difusores escard		semi-transparent difusores semitra		connectors / conectores		other accessories / otros accesorios	
HS-22	17011	MUN-22	17042	ZM-180	42717	8.8x1.2 GLAND /	00802
LIGER-22	17032V1	KIDES-DUO	17131	ZM-90	42716	GLÁNDULA 24x1.6 GLAND /	
clear covers /	metalized end caps /		ZM-120	42728	GLÁNDULA	00820	
difusores clars		tapas finales met	alizados	ZM-135	42720	extrusions /	
HS-22	17022	KIDES-DUO	42618			perfiles	
		KIDECINI DI IO	24153	ZM-PION-90	42718	KIDES-DUO INSERT	B7827
		KIDESIN-DUO	24155	– ZM-PION-135 42719	ATRA	B7454	



KIDES DUO KPL. This profile is designed for demanding users looking for such forms of led lighting that will not only be checked inside but also outdoors. The profile is exceptionally durable and resistant to atmospheric agents, so that you can create external wall fixtures using it. Profile will not be destroyed by the action of intense sun, frost or moisture. However, it is not watertight, so do not use it under water and to create underwater lighting arrangements. Users who choose to profile KIDES DUO KPL. For installation outdoors, special KIDES DUO plugs should be selected. If the profiles are to be installed in the room, either the KIDES DUO caps or the KIDESIN DUO caps can be selected.

The presented profile is simple and hassle-free to assemble. However, always follow the instructions in this manual carefully. A bright and clear guide is included with every order, so that you can attach a profile to the selected area step by step. The assembly will be durable and durable every time, and the light source thus created will work for as many years as it was just after installation.

Each KIDES DUO profile is equipped with two chambers for LED lighting, which makes it possible to direct light both upwards and downwards, depending on the individual needs of the user. The specially designed APRA shutter can also be fitted to the profile, which makes the light source invisible, and the light itself nicely and aesthetically melts on the illuminated surface to create a unique arrangement effect. To profile KIDES DUO KPL. You can also choose two other dials - milk or transparent. The transparent shutter gives bright, strong light and makes the led lighting ideal as a main light source in the room. The milk shed has advantages in terms of functionality as well as arrangement and decoration. The milky shutter gently filters the light that becomes slightly blurry and damp. Choosing a specific shutter is the individual matter of each user and what kind of lighting effect he wants to get in the room.

Each KIDES DUO KPL lighting profile. It consists of two profiles, which together make up a functional whole. Profile TEKIDES DUO is a mounting profile, while OKIDES DUO is the right profile. The upper section of the profile can also be additionally equipped with a DES DESIGN profile for the led, which protects the delicate components of the profile against contact with water. This is especially useful when the profiles are to be used to create light arrangements outside the building. The upper compartment also has a dedicated KIDES insert, while the bottom can be selected for special 22 series casings. The interior of each profile is so constructed that it has enough space for matching power supplies. Assembly of both profiles - proper and assembly - in one piece is fast and hassle-free. The TEKIDES DUO profile is mounted to the selected ceiling or wall surface, then the power is output and the profile adjusted by a one-click connection.

Profile KIDES DUO KPL. This is a modern and comprehensive lighting solution that will test in every interior as the main light source as well as as an arrangement element, emphasizing the unique character of the room. Profiles are made of the highest quality materials and materials, have all the necessary approvals and certificates guaranteeing trouble-free and safe use. Choosing KIDES DUO KPL led profiles. You can be confident that they are investing in the highest quality, which will bring out brilliant light and considerable savings. We would like to invite you to acquaint yourself with the offer of profiles and accessories for them.



10 / Profile wodoszczelne / Waterproof profiles / Wasserdichte Leuchte


KIDES-DUO-KPL

PL/ Komplet profili do **budowy opraw ściennych (kinkietowych)**, świecących w dół i w górę, odpornych na działanie opadów deszczu i śniegu. Linia światła.

EN/ A set of extrusions for **construction of suspended lighting fixtures (wall lamps)**, illuminating downwards and upwards, resistant to the impact of rain and snow. Line of light.

DE / Ein Satz der Profile **zum Bau der regen- und schneefesten Wandleuchten**, die nach unten und nach oben leuchten. Lichtlinie.









KIDES-DUO-KPL

długość	szerokość paska LED	wykończenie powierzchni	numer artykułu
length	LED strip width	surface finish	article number
Länge	Breite LED Band	Oberfläche	Artikelnummer
1m (standard) 2m (standard) 3m (standard) 3 - 6m *	4 x LED strip max. 10,8 mm	anodowany / anodized / eloxiert	18032ANODA

^{*} Na specjalne zamówienie / Special order / Sonderbestellung.



akcesoria / accessories / zubehör


OSŁONKI / COVERS / ABDECKUNGEN

LIGER-22	tworzywo optyczne, linia światła / optical material, line of light / optisches Material, Lichtlinie	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17032
MUN-22	Redukuje zjawisko olśnienia (UGR) przyzachowaniu do 95% przepuszczalności światła / Reduces glare (UGR) while retaining up to 95% light transmission / reduziert Blendung (UGR) bei Behaltung bis zu 95 % Lichtdurchlässigkeit	1m, 2m, 3m (standard)	PC	mrożona / semitransparent / transparent matt	17042
115.00	certyfikat UV, dobra klasa ognioodpomości / UV certificate,	1m, 2m, 3m		mleczna / frosted / opak	17011
HS-22	good class of refractory – resistance / UV-Zertifikat, gute Feuerwiderstandsklasse	(standard)	PC	przezroczysta / transparent	17022
KIDES- DUO	Redukuje zjawisko ośśnienia (UGR) przyzachowaniu dużej przepuszczalności światła / reduces the phenomenon of glare (UGR) while maintaining large light transmission / reduces the phenomenon of glare (UGR) while maintaining light transmission	1m, 2m, 3m (standard)	РММА	mrożona / semitransparent / transparent matt	17131

ZAŚLEPKI / END CAP / ENDKAPPEN


KIDESIN- DUO	zaślepka podstawowa / basic end cap / Endkappe	PP	•	metalizowana / metalised / metallisiert	24153
KIDES- DUO-KPL	zaślepka dla profili uszczelnionych / end cap for sealed extrusions / Endkappe für Dichtprofile		•	metalizowana / metalised / metallisiert	42618

AKCESORIA / ACCESSORIES / ACCESSORIES

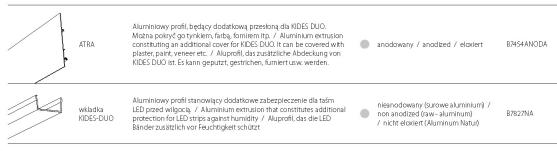



KIDES-DUO-KPL

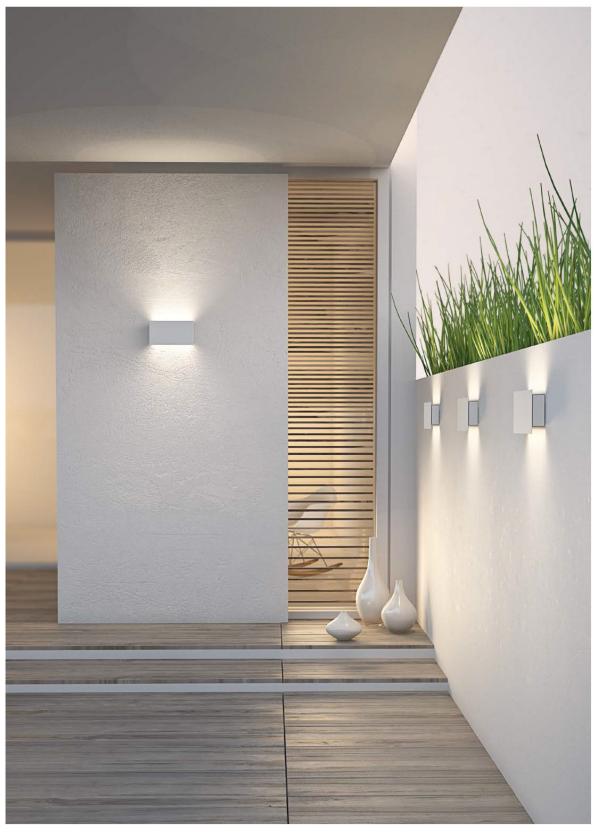

262



KIDES-DUO-KPL



