


Link to the product: <https://stair-lighting.com/profile-led-kides-with-space-for-power-supply-p-1932.html>



## Profile LED KIDES with space for power supply

Price	<b>59.70 Euro</b>
Availability	<b>Available</b>
Shipping time	<b>4 days</b>
Number	<b>1932</b>
Manufacturer	<b>KLUS</b>

### Product description

Profile for the construction of wall fixtures (sconce fixtures), with an option of simultaneous up and down lighting. It has integrated functions: fitting of LEDs and protecting them with a cover (diffuser), surface mounting, as well as an option of installation of power supply and other electronic components, profiles length 100, 200 cm.

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab.

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".


If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.

For each country is different maximum length of the profile that we can send. It does not depend on us only by courier. We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.

Profile z komorą na zasilacz /  
Profile mit Raum für Netzgeräte

## KIDES

REF. 18031

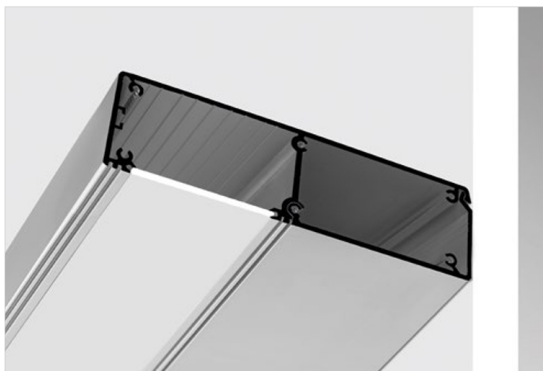

Możliwość uzyskania linii światła.

Oprawa o klasie szczelności IP54 bez konieczności stosowania mas uszczelniających.

Duża przestrzeń na zasilacz, elementy elektroniczne i przyłącze elektryczne.

Prostota konstrukcji.

### PRZEZNACZENIE PRODUKTU:

- do budowy „bryzgo-szczelnych” opraw kinkietowych o dużej wydajności światła.

### MONTAŻ:

- za pomocą listwy montażowej, przytwierdzonej wkrętami odpowiednio dobranymi do rodzaju podłoża.

### DODATKOWE INFORMACJE:


- do zastosowań zewnętrznych i wewnętrznych,
- dobre odprowadzenie ciepła.

### profil / Profil

długość / Länge	szerokość LED / LED-Breite	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m	50 mm	● Srebrny anodowany / Silber eloxiert	<b>18031ANODA_1</b>
2 m			<b>18031ANODA_2</b>
3 m			<b>18031ANODA_3</b>

### akcesoria / Zubehör

osłony mleczne / opale Abdeckungen	zaślepki metalizowane / metallisierte Endkappen
DHS <b>17052</b>	KIDES <b>42617</b>
łączniki / Verbindungsstücke	KIDESIN <b>24152</b>
ZM-180 <b>42717</b>	zaślepki HQ / HQ Endkappen
ZM-90 <b>42716</b>	KIDES-HQ <b>42617</b>
ZM-120 <b>42728</b>	inne akcesoria / sonstiges Zubehör
ZM-135 <b>42720</b>	
ZM-PION-90 <b>42718</b>	DŁAWNICA / KABELVERSCHRAU- BUNG 24x1.6 <b>00820</b>
ZM-PION-135 <b>42719</b>	DŁAWNICA 8.8X1.2 / KABELVERSCHRAU- BUNG 8.8X1.2 <b>00802</b>
osłony przezroczyste / transparente Abdeckungen	
DHS <b>17063</b>	

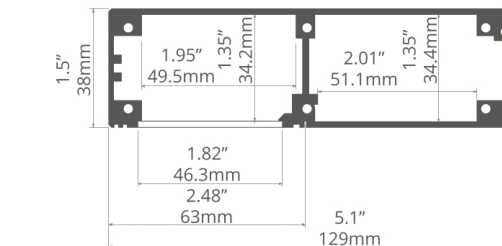

1:2



Lichtlinienfähig.

Leuchte mit Schutzart IP54 bedarf keiner Dichtmassen.

Grosser Raum für das Netzteil, den Stromanschluss und elektronische Komponenten.

Einfacher Aufbau.

### ANWENDUNG


- zur Montage „spritzdichter” Wandleuchten mit hoher Lichtleistung

### MONTAGE

- mit einer Montageleiste, die mit an den Untergrund angepassten Schrauben angeschraubt wird

### ZUSÄTZLICHE INFORMATIONEN

- für Innen- und Außenanwendungen
- gute Wärmeableitung


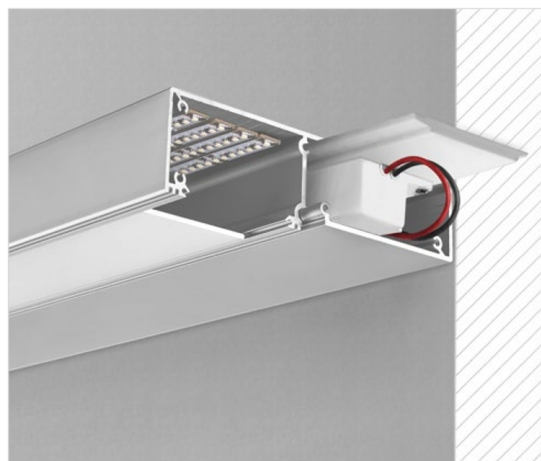




Extrusions with space for power supply /  
Perfiles con alojamiento para suministro de corriente

## KIDES

REF. 18031

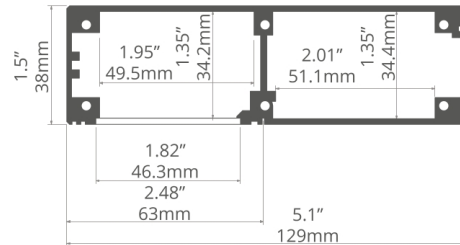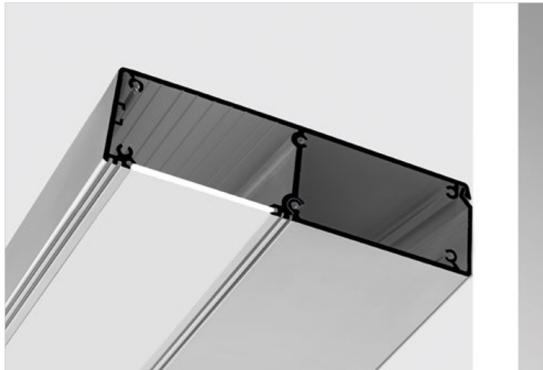

1:2



Possible to obtain a line of light.  
IP54 protection class without the need for sealing compounds.  
Large chamber for power supply, electronic components and electrical connection.  
Simple design.

### APPLICATION

- for construction of "splash-proof" wall lamps with high light efficiency.

### ASSEMBLY

- using a mounting strip fastened with screws appropriately selected for the mounting surface.

### ADDITIONAL INFORMATION


- wide range of end caps.
- for outdoor and indoor applications.
- good heat dissipation.

### extrusion / perfil

length / longitud	space for LED strip / espacio para tira de LED	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m			<b>18031ANODA_1</b>
78.7" / 2 m	1.96" / 50 mm	● Silver anodized / Ánodo de plata	<b>18031ANODA_2</b>
118" / 3 m			<b>18031ANODA_3</b>

### accessories / accesorios

frosted covers / difusores escarchados	metalized end caps / tapas finales metalizados
DHS <b>17052</b>	KIDES <b>42617</b>
	KIDESIN <b>24152</b>
connectors / conectores	HQ end caps / tapas finales HQ
ZM-180 <b>42717</b>	KIDES-HQ <b>42636</b>
ZM-90 <b>42716</b>	
ZM-120 <b>42728</b>	
ZM-135 <b>42720</b>	other accessories / otros accesorios
ZM-PION-90 <b>42718</b>	8.8x1.2 GLAND / GLÁNDULA <b>00802</b>
ZM-PION-135 <b>42719</b>	24x1.6 GLAND / GLÁNDULA <b>00820</b>
clear covers / difusores claros	
DHS <b>17063</b>	

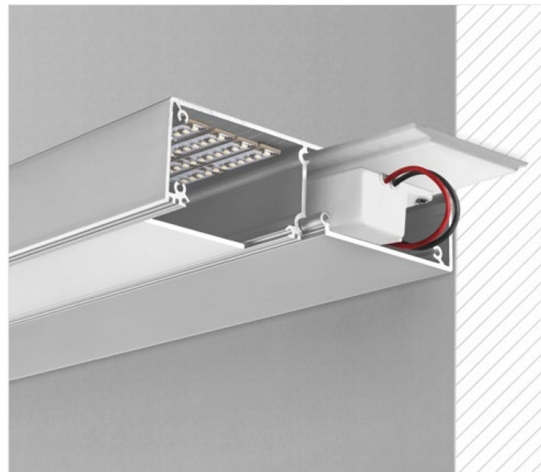

If you are looking for durable, aesthetical and long-lasting LED profiles that will work in all conditions, we highly recommend KIDES KPL profiles. These are products with increased mechanical resistance and adverse weather conditions. They can be mounted both indoors and outdoors without any fear. This makes them ideal for illumination of residential and commercial spaces, as well as for the creation of interesting lighting arrangements on property, in gardens and on various facilities. They are durable and do not suffer damage even under the influence of wind, strong sun or rain, snow and frost. The profiles are not completely waterproof - they will not be damaged by rain, they are not meant to be submerged in water and create interesting underwater exposure. Profiles for special tasks KIDES KPL. This is a solution that will satisfy even the most demanding users.

Profile KIDES KPL. This is an impressive linear light directed down. They are not only functional but also elegant and aesthetically so that they perfectly emphasize the nature of the place where they will be installed. Profiles are not only durable but also very easy to assemble. They can be mounted on their own, without having to use specialist services. Each profile is accompanied by a clear user guide that will guide you through the installation step by step. Please note that all parts of the profile should be assembled in accordance with the instructions in the manual. It is particularly important to use the appropriate plugs. When installing profiles outside, only KIDES KPL plugs must be used. On the other hand, when mounting profiles inside rooms, both the above-mentioned plugs and the KIDESIN plug can be used.

Each KIDES KPL profile. It consists of two co-operating profiles TEKIDES and the corresponding OKIDES. The proper profile is equipped with suitable power supplies. Mount the mounting profile to the selected surface, remove the power supply, and then fix it by clicking the appropriate profile. The last step is to install the plugs. The entire assembly work is extremely short, so that you can enjoy the interesting lighting almost immediately after unpacking the entire set.

To KIDES KPL profiles. Two types of casings are available to choose from, depending on their individual needs and where they are to be installed. Shells are available: milk and transparent. The transparent sheath provides strong, bright light and makes the profile a major part of the interior lighting. The dairy sheath is a more decorative solution - it gently filters the light and highlights the interior elements that are located directly near the light source.


Profile KIDES KPL. This is a solution that is designed for any kind of interior with any style. They are attractive, have an interesting design and are made of high quality materials and care for the finest details. Just as trouble-free is their installation, the same problem-free operation is also a problem. Once assembled for many years they function as new. Led profiles are a durable, functional and energy efficient solution. By investing in led lighting, you can be sure that your electricity bill will decrease considerably. Leds and led bulbs draw little power from the network. The led profiles have so many advantages that they do not have traditional light sources. We invite you to familiarize yourself with the unique KIDES KPL profiles. They will surely meet all the expectations they have in them. If you have any questions about the function or resistance of the profiles, we are at your disposal.

## KIDES-KPL

PL / Komplet profili do **budowy opraw ściennych (kinkietowych)**, świecących w dół, odpornych na działanie opadów deszczu i śniegu. Linia światła.

EN / A set of extrusions for **construction of suspended lighting fixtures (wall lamps)**, illuminating downwards, resistant to the impact of rain and snow. Line of light.

DE / Ein Satz der Profile **zum Bau der regen- und schneefesten Wandleuchten**, die nach unten und nach oben leuchten. Lichtlinie.

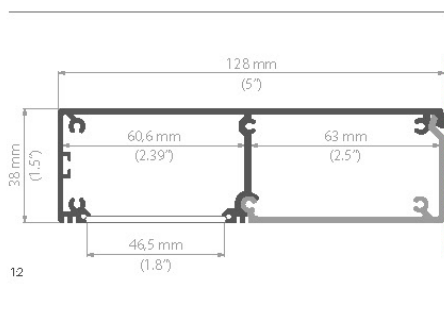


### KIDES-KPL

dlugość length Länge	szerokość paska LED LED strip width Breite LED Band	wykończenie powierzchni surface finish Oberfläche	numer artykułu article number Artikelnummer
1m (standard) 2m (standard) 3m (standard) 3 - 6m *	4 x LED strip max. 10,8 mm	● anodowany / anodized / eloxiert	18031ANODA





\* Na specjalne zamówienie / Special order / Sonderbestellung.

akcesoria / accessories / zubehör

OSŁONKI / COVERS / ABDECKUNGEN

	DHS	łatwy montaż, dobre rozpraszanie światła / easy to assemble, very good light dispersion / einfach zu montieren sehr gute Lichtstreuung	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17052
					przezroczysta / transparent	17063

ZAŚLEPKI / END CAP / ENDKAPPEN


	KIDESIN	zaślepka podstawowa / basic end cap / Endkappe	PP		metalizowana / metalised / metallisiert	24152
	KIDES-KPL	zaślepka dla profili uszczelnionych / end cap for sealed extrusions / Endkappe für Dichtprofile			metalizowana / metalised / metallisiert	42617

KIDES-KPL





KIDES-KPL

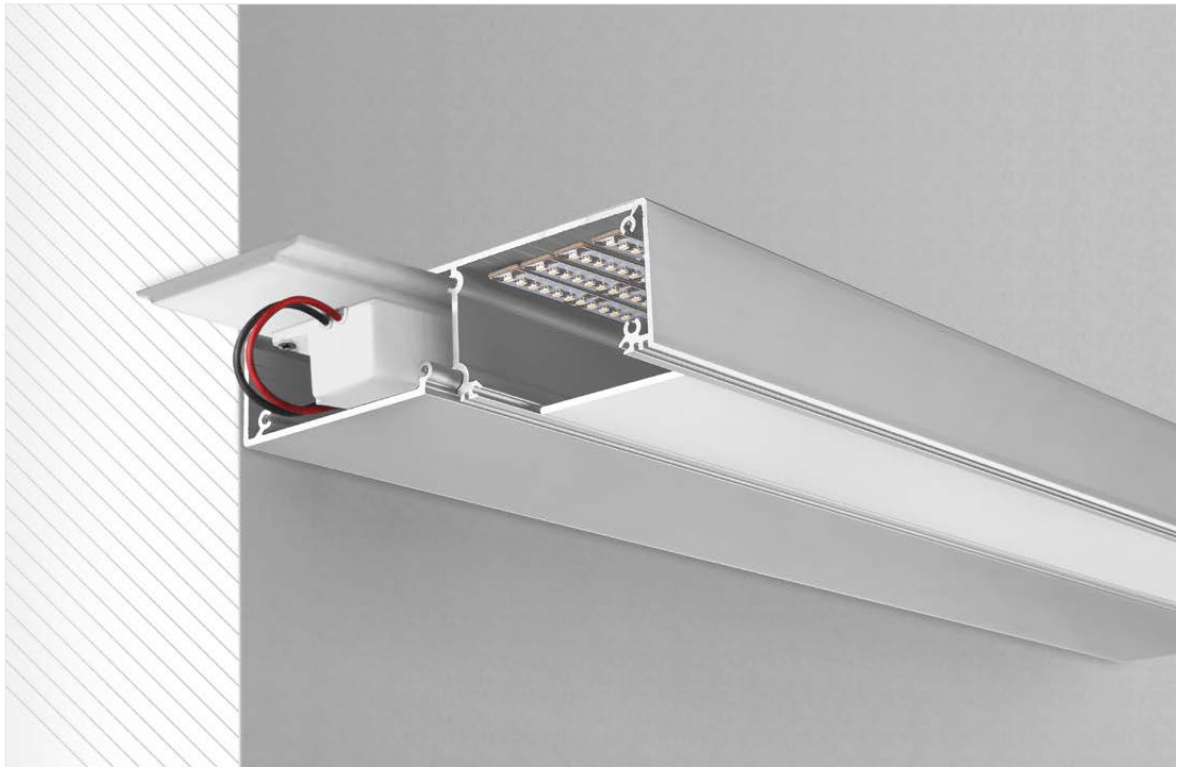

KIDES-KPL

