

Link to the product: https://stair-lighting.com/profile-led-micro-k-nu-pro-8k-alu-ano-p-68.html



## Profile LED MICRO-K - NU-PRO 8K ALU ANO

Price	6.57 Euro
Availability	Available
Shipping time	3 days
Number	69
Manufacturer	KLUS

### **Product description**

Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process. The details of the shipping method and packaging of the aluminum profiles you will find here (click in the link)

#### Anodized aluminum profile

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".

If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.


For each country is different maximum length of the profile that we can send. It does not depend on us only by courier. We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.




Profile do wbudowania / Profile für Einbaumontage

### MICRO-K

REF. B3775







Maskowanie krawędzi wpustu. Niewielki, lekki profil.

#### PRZEZNACZENIE PRODUKTU:

 budowa opraw wbudowanych, głównie do stosowania we wnętrzach np: podświetlenie mebli.

#### MONTAŻ:

- za pośrednictwem klejów montażowych i profesjonalnych taśm dwustronnie przylepnych.

## Abdeck

#### Abdecken des Nutrandes. Kleines, leichtes profil.

#### ANWENDUNG

- für eingebaute Leuchten, hauptsächlich in Innenräumen z.B.: Möbelbeleuchtung

#### MONTAGE

 mit Montageklebern und professionellen doppelseitigen Klebebändern

#### profil / Profil

promit i rom			
długość / Länge	szerokość LED / LED-Breite	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m			B3775ANODA_1
2 m	11 mm	Srebrny anodowany / Silber eloxiert	B3775ANODA_2
3 m			B3775ANODA_3

#### akcesoria / Zubehör

osłony mleczne / opale Abdeckungen	
KA	17035
KA-COM	17121
HS	1369
LIGER	17037
KA-PRO	17064
osłony przezroczyste	. /
transparente Abdeck	
transparente Abdeck	ungen
transparente Abdeck	17036
KA-COM	17036 17122
KA-COM	17036 17122 1370 17065

zaślepki szare / graue Endkappen	
MICRO-K	1430
MICRO-K-OTW	1448
MICRO-K-MW	00025
MICRO-K-OTW-MW	00308
zaślepki białe / weisse Endkappen	
MICRO-K	20004
MICRO-K-OTW	21004
MICRO-K-OTW-MW	23004

zaślepki metalizo metallisierte End	
MICRO-K	24060


inne akcesoria / sonstiges Zubehör DŁAWNICA 8.8X1.2 / KABELVERSCHRAU-BUNG 8.8X1.2




# Recessed extrusions / Perfiles empotrados

### MICRO-K

REF. B3775







#### Small size.

Masks the edges of the groove.

#### APPLICATION

construction of lighting fixtures incorporated as furniture lighting.

with mounting adhesive and professional double-sided adhesive tapes.

#### ADDITIONAL INFORMATION

- the extrusion will fit in 0.47" / 12 mm thick drywall. dimensions of the mounting channel for fixing the extrusion: 0.70" / 18 mm x 0.27" / 7 mm (depth).
- the line of light obtainable with a LIGER cover and with a LED strip with a minimum of 36 LED/ft / 120 LED/m.



#### Tamaño pequeño.

Enmascara los bordes de la ranura.

#### APLICACIÓN

construcción de luminarias incorporados como iluminación de muebles.

con adhesivo de montaje y cintas adhesivas profesionales de doble cara.

#### INFORMACIÓN ADICIONAL

- el perfil cabe en un panel con un grosor de cartón yeso 0.47" / 12 mm de espesor.
- medida del canal para fijar el perfil: 0.70" / 18 mm x 0.27" / 7 mm (profundidad).
- se puede obtener un haz de luz con el difusor LIGER y una tira de LED con una cantidad mínima 36 LED/ft / 120 LED/m.

#### extrusion / perfil

length / longitud	space for LED strip / espacio para tira de LED	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m			B3775ANODA_1
78.7" / 2 m	0.43" / 11 mm	Silver anodized / Ánodo de plata	B3775ANODA_2
118" / 3 m			B3775ANODA_3

#### accessories / accesorios

frosted covers / difusores escarcha	adas
KA	17035
KA-COM	17121
HS	1369
LIGER	17037
KA-PRO	17064
covers clear /	

difusores transp	arentes
KA	17036
KA-COM	17122
HS	1370
KA-PRO	17065

difusores negro	
LIGER	17040
grey end caps / tapas finales gris	
MICRO-K	1430
MICRO-K-OTW	1448
MICRO-K-MW	00025
MICRO-K-OTW-MW	00308

metalized end caps / tapas finales metaliza	dos
MICRO-K	24060
white end caps / tapas finales blanco	
MICRO-K	20004
MICRO-K-OTW	21004
MICRO-K-OTW-MW	23004

other accessories / otros accesorios	
8.8x1.2 GLAND / GLÁNDULA	00802



Aluminium profile LED Micro-K is characterized by extremely small size (only 6mm height), by which adapts perfectly to different types of elements. Without problem it will allow you to hide the fixtures in the walls of the furniture, even a very small cross-sections.

Each perfectionist knows how much they have great detail. Specific collar fitted to the profile can with great precision to hide unsightly edges of the eye, the channel specially prepared for this purpose well. Profile LED can be used in the course of interior design to illuminate various objects. It can be included not only in the bars soft but also hard.

Suitable for both internal (to be placed in the canals furniture panels as well as panels of cardboard and gypsum) and external.

Depending on your needs, you can waterproof.

Mounting profile is not the most difficult. Just use for this purpose various types of assembly adhesives or double-sided adhesive tape, which can easily be found in the accessories.

The overall width of the profile is 15.2 mm, and the height of only 6 mm.

Due to the material of the profile is characterized by a remarkable resistance to mechanical damage and corrosion processes.

Incredibly easy to install, no problem You can do it yourself.

Because of its light weight is extremely mobile.

At the ends of each profile can be placed properly fitted cap made of plastic, which can be found in the accessories section.




0.3/ Profile do wbudowania / Recessed extrusions / Profile fuer einbaumontage

## MICRO-K

PL/ Małe gabaryty - **wysokość tylko 6mm**. Profil z kołnierzem do montażu we wpustach.

EN/ Small overall dimensions - **height only 6 mm**. Extrusion with a flange for assembly in grooves.

DE/ Kleine Größe - **Höhe nur 6 mm**. Das Profil mit einem Flansch zur Montage in Falzen.

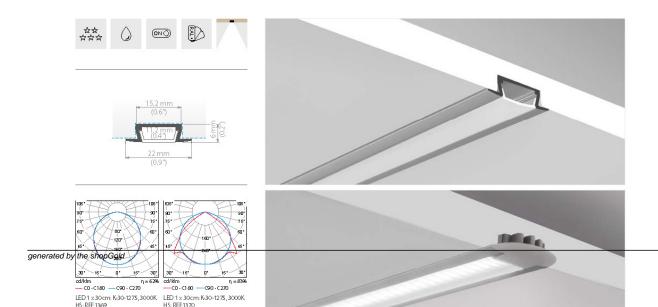



akcesoria / accessories / Zubehör

#### OSŁONKI / COVERS / ABDECKUNGEN

	12	latwy montaż / easy to assemble / einfach zu montieren	1m, 2m, 3m	D.C.	mleczna / frosted / opak	1547
	К		(standard)	PC	przezroczysta / transparent	1548
	V6 v4	KA-v1 latwy montaż / easy to assemble / einlach zu montieren	1m, 2m, 3m	PC	mleczna / frosted / opak	17035
	NA-VI		(standard)	PC	przezroczysta / transparent	17036
	KA-BIS	łatwy montaż, dobre rozpraszanie światła / easy to assemble, very good light dispersion / einfach zu montieren sehr gute	1m, 2m, 3m	PC	mleczna / frosted / opak	17071
	NA-BIS	very good light dispersion / einlach zu montieren sehr gute Lichtstreuung	(standard)	PC PC	przezroczysta / transparent	17072
	KA-COM	łatwy montaż / easy to assemble / einfach zu montieren	1m, 2m, 3m	PVC	mleczna / frosted / opak	17121
	KA-COM salwy moniaz / easy to assemble / emiachza moniteren	(standard)	PVC	przezroczysta / transparent	17122	
	certyfikat UV, dobra klasa ognioodpomości / UV certificate, good dass of refractory – resistance / UV-Zertifikat, gute Feuerwiderstandsklasse	1m, 2m, 3m PC (standard)	DC.	mleczna / frosted / opak	1369	
			rC	przezroczysta / transparent	1370	
	LIGER-v1	doskonałe właściwości rozpraszające, wysoka jakość / excelient diffusing properties, high quality / Hervorragende diffundierende Eigenschaften, hohe Qualität	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17037


#### ZAŚLEPKI / END CAP / ENDKAPPEN

MICRO-K	zaślepka podstawowa / basic end cap / Endkappe	PP		jasno szara / light gray / hellgrau	1430
		PP		metalizowana / metalised / metallisiert	24060
		PP	0	biała / white / weiss	20004
MICRO-K	zaślepka z otworem / end cap with hole / Endkappe mit Kabelausgang	PP	0	jasno szara / light gray / hellgrau	1448
		PP	0	biała / white / weiss	21004

<sup>\*</sup> Dostępne po uzgodnieniu z działem handlowym firmy / Available by arrangement with sales department of / verfügbar nach Absprache mit dem Vertrieb von .



MICRO-K

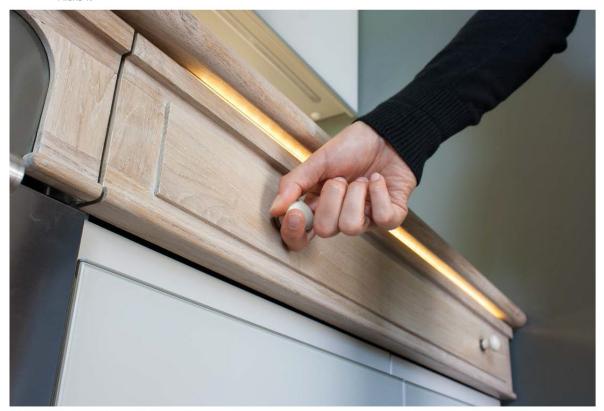



116



MICRO-K



