

Link to the product: <https://stair-lighting.com/profile-led-pds-o-nu-pro-10-alu-ano-p-71.html>

Profile LED PDS-O - NU-PRO 10 ALU ANO

Price	6.84 Euro
Availability	Available
Shipping time	3 days
Number	61
Manufacturer	KLUS

Product description

Important Information

The purchase a piece in the store means the purchase 1 linear meter of the profile or cover

If you want to buy a profile that has a length of 2 meters you have to buy 2 pieces, 3 meters you have to buy 3 pieces, and the multitude of quantity when ordering.

The total length of the aluminum profile or the panel to the profile - is the total quantity of the piece number that was bought in the store.

The choice of the appropriate shipping method will take place at the end of the order process.

[The details of the shipping method and packaging of the aluminum profiles you will find here \(click in the link\)](#)

The product you have selected contains only - aluminum profile - does not include the accessories located in the Accessories tab.

Additional accessories like covers, end caps, electricity conductive end cap, mounting bracket, fasteners, mounting springs, proximity switch, micro switch, mounting system and others are available under "Accessories".


If you are interested in longer lengths than one meter, write to us we will quote the delivery cost to you. Transport companies expect additional charges for long shipments.

For each country is different maximum length of the profile that we can send. It does not depend on us only by courier. We also do service cutting aluminum profiles to the indicated size - write or call get comprehensive information.

Profile uniwersalne do montażu na powierzchni, wbudowania lub podwieszenia /
Universalprofile zur Aufputz, Unterputzmontage oder zum Abhängen

PDS-O

REF. B3777

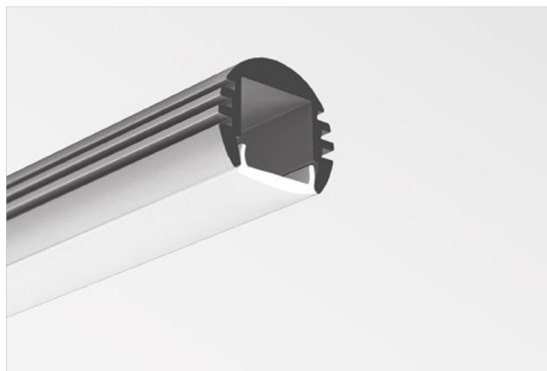


Estetyczna forma.
Możliwość uzyskania linii światła.
Dobre odprowadzenie ciepła.

PRZEZNACZENIE PRODUKTU:

- profil służy do budowy niewielkich opraw oświetleniowych o okrągłym przekroju (wraz z osłonką PDS-LUK).

MONTAŻ:

- za pomocą zaślepek przewodnikowych,
- za pomocą mocowników i zawieszek dostępnych w ofercie .



Ansprechende Form.
Lichtlinienfähig.
Gute Wärmeableitung.

ANWENDUNG

- mit dem Profil werden kleine Leuchten mit rundem Querschnitt gebaut (mit der Abdeckung PDS-LUK)

MONTAGE

- mit stromleitenden Endkappen
- mit Befestigungsclips und Befestigungen von

profil / Profil

długość / Länge	szerokość LED / LED-Breite	wykończenie powierzchni / Oberfläche	numer artykułu / Artikelnummer
1 m	10 mm	● Srebrny anodowany / Silber eloxiert	B3777ANODA_1
2 m			B3777ANODA_2
3 m			B3777ANODA_3



akcesoria / Zubehör

osłony mleczne / opale Abdeckungen	zaśleпки szare / graue Endkappen	zawieszki / Befestigungen	główce / Köpfe
KA 17035	PDS-O 1439	DP-MOC 00645	ST 42216
KA-COM 17121	PDS-O-OTW 1441	DP-MOC-ZO 00646	ZO 42217
HS 1369	PDS-O-MW 00028	DP-MOC-ZZ 00647	ZZ 42218
LIGER 17037	PDS-O-OTW-MW 00029	DP-PDS-O 00648	zestawy mocowań / Befestigungssätze
PDS-LUK 17076	PDS-O-LUK 24213	DP-ZO-PDS-O 00650	M3 42303
KA-PRO 17064	zaśleпки metalizowane / metallisierte Endkappen	DP-ZZ-PDS-O 00655	M4 42301
osłony przezroczyste / transparente Abdeckungen	PDS-O 24059	mocowniki / Befestigungsclips	M5 42302
KA 17036	zaśleпки przewodnikowe / leitende Endkappen	PDS-STN 24190	M14 42612
KA-COM 17122	PDS-O 1435	PDS 24189	W8 42606
HS 1370	PDS-O 42615	PDS 24223	W9 42607
KA-PRO 17065	PDS-O-LUK 42621	PL-PDM 24041	W10 42608
osłony czarne / schwarze Abdeckungen		REG-PD-UV 24270	RG-1 42647
LIGER 17040		PD-MICRO 42150	RG-1 42648

Universal Extrusions for surface mount, recessed or suspended applications /
Perfiles universales para aplicaciones de montaje en superficie, empotradas o suspendidas

PDS-O

REF. B3777

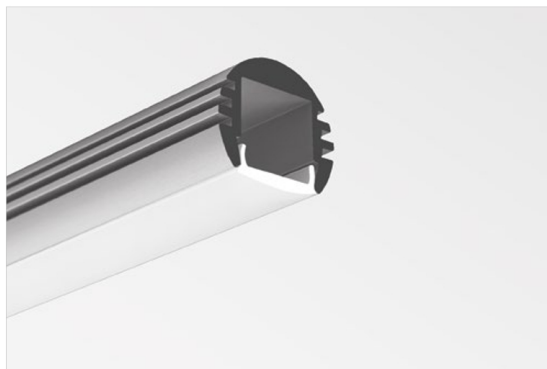

Appealing form.
Possible to obtain a line of light.
Good heat dissipation.

APPLICATION

- for construction of linear suspended lighting fixtures.

ASSEMBLY

- with electricity conductive end caps.
- with mounting brackets and fasteners.

ADDITIONAL INFORMATION

- a wide range of accessories and metalized plastic end caps.



Diseño atractivo.
Capacidad de obtener una línea de luz.
Buena disipación de calor.

APLICACIÓN

- para la construcción de luminarias suspendidas lineales.

MONTAJE

- con tapas conductoras de electricidad.
- con soportes de montaje y sujetadores.

INFORMACIÓN ADICIONAL

- una amplia gama de accesorios.

extrusion / perfil

length / longitud	space for LED strip / espacio para tira de LED	surface finish / terminado de superficie	reference number / número de artículo
39.4" / 1 m			B3777ANODA_1
78.7" / 2 m	0.39" / 10 mm	● Silver anodized / Ánodo de plata	B3777ANODA_2
118" / 3 m			B3777ANODA_3

accessories / accesorios

frosted covers / difusores escarchados	grey end caps / tapas finales gris	fasteners / soportes	heads / cabezales
KA 17035	PDS-O 1439	DP-MOC 00645	ST 42216
KA-COM 17121	PDS-O-OTW 1441	DP-MOC-ZO 00646	ZO 42217
HS 1369	PDS-O-MW 00028	DP-MOC-ZZ 00647	ZZ 42218
LIGER 17037	PDS-O-OTW-MW 00029	DP-PDS-O 00648	
PDS-LUK 17076	PDS-O-LUK 24213	DP-ZO-PDS-O 00650	mounting sets / sets de montaje
KA-PRO 17064	metalized end caps / tapas finales metalizados	DP-ZZ-PDS-O 00655	M3 42303
	PDS-O 24059	mounting brackets / soporte de montaje	M4 42301
clear covers / difusores transparentes	electricity conductive end caps / tapas finales conductora de electricidad	PDS-STN 24190	M5 42302
KA 17036	PDS-O 1435	PDS 24189	M14 42612
KA-COM 17122	PDS-O 42615	PDS 24223	W8 42606
HS 1370	PDS-O-LUK 42621	PL-PDM 24041	W9 42607
KA-PRO 17065		REG-PD-UV 24270	W10 42608
black covers / difusores negro		PD-MICRO 42150	RG-1 42647
LIGER 17040			RG-1 42648

The PDS-O profile has a circular cross-section. It was produced from high-grade, double-anodized aluminum, a variety of tapes and strips whose width is not more than 10,8mm (tapes and strips equipped with LED light source).

The PDS-profile is most often applicable to the LED lighting strips arranged on the soft and hard, and illumination of the lighting (in this case, it depends on the power applied LEDs), for the construction of lighting fixtures tower. This profile can also be used in luminaires undeveloped, and also use it internally for interior (for lighting cabinets, sites to be placed in niches ceiling), stage design, advertising, lighting jobs, especially in hard to reach and shady places. There is also the possibility of the luminaire, which will be characterized by high tightness and its class of resistance against ingress of solid objects, dust and water will be IP 67, so that the profile can be used for external use.

Installation profile PDS-O is very simple. Fastening the profile to the substrate is using a specific montage bracket, which ensures a simple yet secure installation on a surface that is not perfectly flat. When used finds a very high density of LED lighting and milk shell type HS or LIGER it will be possible to obtain a uniform line of light.

The LEDs should override specially dedicated for this purpose cover types to choose from: K, KA-BIS, HS (a choice of opal or transparent), LIGER (version milky opaque) and ordinary transparent focusing S, thanks to which it is possible to obtain a light angle sources amounting to exactly 10 degrees. The material from which are made the cover is polycarbonate. In addition, the shield HS is certified, which guarantees its excellent resistance to sunlight, rain, snow and other weather factors, UV radiation, and flame retardants.

Profile are dedicated additional standard or conduction polypropylene caps and brackets for which are made of galvanized steel or chrome-plated steel. It is assumed to be primarily in order to protect the profile against the ingress into it of dust or other unwanted objects that could contaminate the LED strip, thereby drastically impair the light performance.

We invite you to familiarize yourself with our offer.

Profile LED NU- PRO 10 ALU ANO (PDS -O alu) - led housing

Purpose:

for LED lighting strips on soft or hard

for lighting and illumination (depending on the power of applied LEDs)

to build a free-standing luminaires ,

for use in luminaires undeveloped

for indoor applications : interior design, set design , advertising , work stations (it is available, shaded area)

external (the possibility of obtaining waterproof IP 65)

Product Description:

material : anodized aluminum

Cover: frosted, clear (choice in accessories)

Standard length : 1m , 2m

mount : mount designed individually , depending on the type and purpose of fixtures

Ending : Plastic plug

Certificate: CE

patent rights

Profile PDS -O is not limited applicability . Presented below contains further configuration , plug and brackets for (see related

products) used depending on the application : Fastener assets - conductive , if you want to take advantage of rotational profile, or simply plugs with brackets for classic chrome / zinc if we just fixed position allowing for lighting the selected area .

Advantages :

small size , excellent heat dissipation , profile offers ample opportunities to build individual projects, lamps , light weight , environmentally friendly product



0.1 / Profile do montażu na powierzchni / Surface mount extrusions / Profile zur Montage auf der Oberfläche

PDS-O

PL / **Piękna forma.** Profil służy do budowy niewielkich opraw oświetleniowych o okrągłym przekroju.

EN / **Beautiful form.** The extrusion is used to build small lighting fixtures with a round cross section.

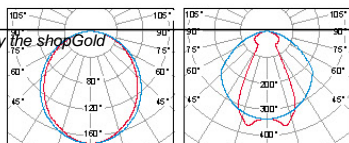



DE / **Schöne Form.** Das Profil dient zum Bau der kleinen Leuchten mit dem kreisförmigen Querschnitt.






OSŁONKI / COVERS / ABDECKUNGEN

	K	łatwy montaż / easy to assemble / einfach zu montieren	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	1547
					przezroczysta / transparent	1548
	KA-v1	łatwy montaż / easy to assemble / einfach zu montieren	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17035
					przezroczysta / transparent	17036
	KA-BIS	łatwy montaż, dobre rozpraszanie światła / easy to assemble, very good light dispersion / einfach zu montieren sehr gute Lichtstreuung	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17071
					przezroczysta / transparent	17072
	KA-COM	łatwy montaż / easy to assemble / einfach zu montieren	1m, 2m, 3m (standard)	PVC	mleczna / frosted / opak	17121
					przezroczysta / transparent	17122
	HS	certyfi kat UV, dobra klasa ognioodporności / UV certificate, good class of refractory – resistance / UV-Zertifikat, gute Feuerwiderstandsklasse	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	1369
					przezroczysta / transparent	1370
	LIGER-v1	doskonale właściwości rozpraszające, wysoka jakość / excellent diffusing properties, high quality / Hervorragende diffundierende Eigenschaften, hohe Qualität	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17037
	PDS-LUK	ryflowana powierzchnia, pasuje do zaślepek PDS-O-LUK / raised grip, suitable for PDS-O-LUK end caps / geriffelte Oberfläche, passt zur Endkappe PDS-O-LUK	1m, 2m, 3m (standard)	PC	mleczna / frosted / opak	17076

ZAŚLEPKI / END CAP / ENDKAPPEN

	PDS-O	zaślepka podstawowa / basic end cap / Endkappe	PP	jasno szara / light gray / hellgrau	1439
			PP	metalizowana / metalised / metallisiert	24059
	PDS-O	zaślepka z otworem / end cap with hole / Endkappe mit Kabelausgang	PP	jasno szara / light gray / hellgrau	1441
	PDS-O	zaślepka przewodnikowa / electricity conductive end cap / Endkappen für Stromversorgung	PP, elementy metalowe / PP, metallic elements / PP, Metallelemente	jasno szara / light gray / hellgrau	1435
	PDS-O-LUK	zaślepka do stosowania z osłonką PDS-LUK / end cap for use with PDS-LUK cover / Endkappe zum Einsatz mit Abdeckung PDS-LUK	ABS	jasno szara / light gray / hellgrau	24213


AKCESORIA MONTAZOWE / MOUNTING ACCESSORIES / MOUNTING ACCESSORIES

	PDS-STN		stal sprężynowa, nierdzewna / spring steel, stainless steel / Federstahl, Edelstahl	24190
	-	mocownik / mounting bracket / Befestigungsclip	ocynk / zinc / verzinkt	1072
	-		chrom mat. / chrome matte / matt verchromt	1345
	PL-PDM	mocownik / mounting bracket / Befestigungsclip	PP	24041
	REG-PD	mocownik z regulacją / mounting bracket with beam angle regulation / Befestigungsclip, einstellung des Leuchtwinkels	PP, elementy metalowe / PP, metallic elements / PP, Metallelemente	24154

PDS-O



PDS-O

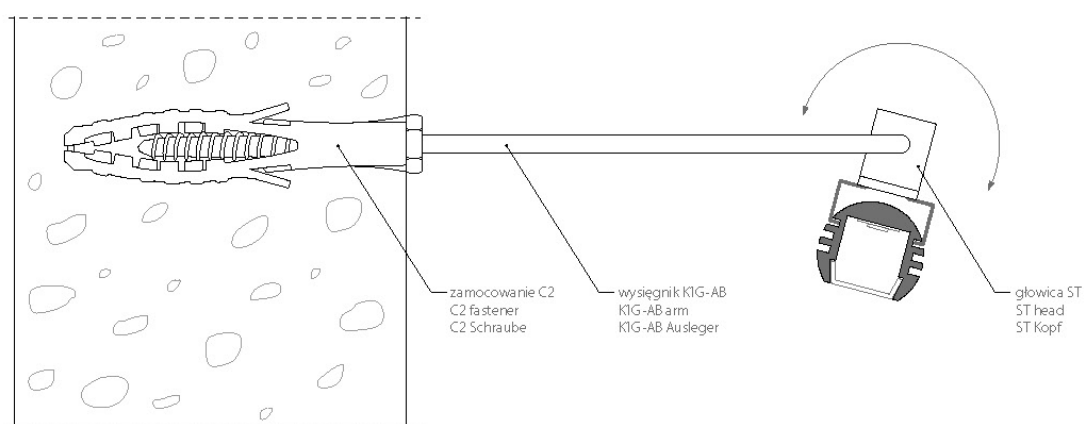

PDS - O

31

generated by the shopGold

PDS-O - ZAŚLEPKA PRZEWODNIKOWA / ELECTRICITY CONDUCTIVE END CAP /
ENDKAPPE FÜR STROMVERSORGUNG

1439



1441



1435



