

Link to the product: https://stair-lighting.com/t2-miboxer-4-zone-cct-adjust-smart-panel-remote-controller-p-1863.html



T2 Miboxer - 4-Zone CCT Adjust Smart Panel Remote Controller

Price	25.61 Euro
Previous price	4 6.31 Euro
Availability	Available
Shipping time	4 days
Number	1863
Manufacturer	Mi.Light

Product description


Pilot MILIGHT - 4-Zone CCT Adjust Smart Panel Remote Controller - T2 is a modern device, which in its operation uses the most advanced technologies. This solution is very handy and easy in everyday use. Thanks to the ingenious pilot, easily will be able to manage the lighting throughout the house.

The control panel is equipped with a memory function. For this reason, the previous settings will be resumed when you restart the remote control. The remote control has a maximum range of thirty meters. The study uses a WiFi network. It is easy to mount it to the wall. As a result, certainly will not get lost, and in addition will look aesthetically. Using the remote control and its programming to support a particular zone is simple and everyone can handle this. The remote control allows the division of space for up to four zones, which as needed can be expanded.

You want LED light shone only on the kitchen counter, where you are working, or maybe you feel like the only decorative lighting image? Regardless of the circumstances, it was this panel is for you the ideal solution. You can finally choose what light is to shine and use a dimmer to create the optimum conditions for your needs. It's simple, and you of times you'll love the modern economy. Sometimes, in the end you do not need intense light. With LEDs, energy consumption in your home or business is a significant decrease, and you will remain a joy with a well-taken investments. Through MILIGHT - 4-Zone CCT Adjust Smart Panel Remote Controller - T2, the operation of the system Milight will be even easier.

Product Name: 4-Zone CCT Adjust Smart Panel Remote Controller Model No.: T2 Working Temperature: -20 -60°C Voltage: AC90~110V or AC180~240V Transmission Frequency: 2400-2483.5MHz Modulation Method: GFSK Transmitting Power: 6dBm Control Distance: 30m Panel Size: 86*86mm



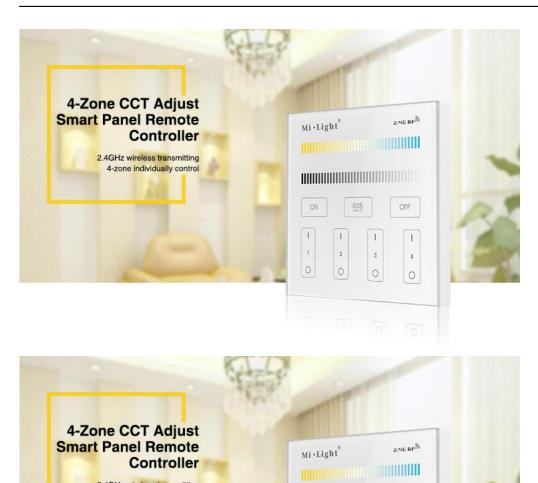

60S

1

3

0

I.

2

0

OFF

1

4

0

ON

T.

t

0

2.4GHz wireless transmitting 4-zone individually control













Compatible Dual White series Control all Mi-Light Dual White LED bulbs, Dual White LED controllers



