

Link to the product: https://stair-lighting.com/tango-mini-p-1582.html



## Tango mini

Price	15.87 Euro
Availability	Available
Shipping time	5 days
Number	1582
Manufacturer	SKOFF

### **Product description**

Presented on this page LED lighting fittings produced in the collection of the Music Line SKOFF by a Polish company, is in its form, function and technical parameters equivalent of the TANGO fittings. The difference is of course the size, which tells us the product name. Opening or electro-mounting box, to mount the holder should have a diameter of 5cm. The dimensions of the device itself is 6x6cm.

The elegant style of housing is taken from the world of geometry. We have a square surface color to choose between aluminum and steel. The module itself is partially visible, so that the light beam has a longer range and is more diffuse compared to luminaires Short. The light emitted is according to customer preferences in white, warm white, blue, red, or green. Power consumption is a range 0,3-1W for both possible degrees of protection. IP20 means that the LED module is protected against damage to the fingers and against small foreign objects. While more advanced protection is possible with the model with IP56. Then it will not damage or water spray. It is worth mentioning that the manufacturer gives 24 months warranty, service life of the LED module is estimated at 50 thousand.

It seems that this is an ideal setting on the next steps in the stairwell or just above the floor in a modern long corridor. However, the lobby and offices, which immediately come to mind associations are not the only places where SKOFF already debuted. The ingenuity of our customers is enormous and creativity promotes universal design.

LED Lighting fitting, designed to highlight passages

• Long life - 50 000 h • Very low energy consumption

· Robust design

Material: Stainless steel or Aluminum

Application:

· stair risers

glass cabinetsdecorating the walls with light

#### **Available types**

Sympol	FINISNING	Colour or light	nower consumption LWI	Indeks
ML-RM-K-W	Stainless steel	white	0,4	IVIL-RIVII-K-VV
MC-RM-K-VVVV	Stainless steel	warm white	0,4	ML-RMI-K-H
MC-RM-K-R	Stainless steel	red	0,5	ML-RMI-K-R
MC-RM-K-B	Stainless steel	biue	0,4	ML-RMI-K-B
ML-RM-K-G	Stainless steel	green	0,3	ML-RMI-K-G
IVIL-RIVI-G-VV	Aluminum	white	0,4	MC-RMI-G-W
lΨL-RIΨ-G-VVVV	Aluminum	warm white	0,4	MC-RMI-G-H
ML-RM-G-R	Aluminum	red	0,5	ML-RMI-G-R
ML-RM-G-B	Aluminum	biue	0,4	ML-RMI-G-B



Aluminum

### **Technical data**

Supply voltage: 10 V DC

Light source: LED

in the installation box Ø50in the opening Ø50 Installation:

Ingress Protection IP 20 Rating:

Typee of connection: parallel

Recommended power supplies: ZOL6, ZOL7, ZOL15, ZOL16


### **Commercial data**


Device weight:


Device dimensions: 60 x 60 mm Warranty period: 24 mo.





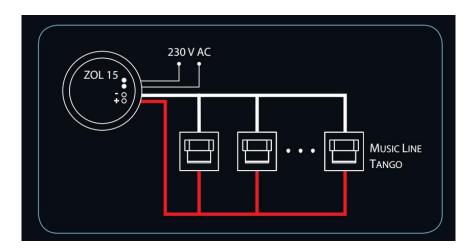

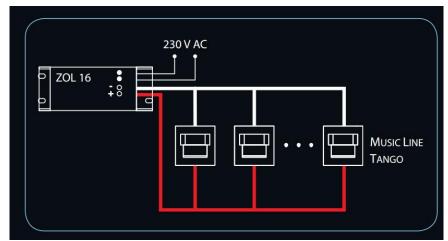

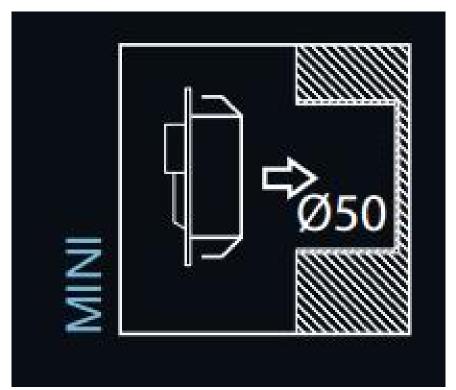



# This product has additional options:

**Housing**: INOX , Aluminum

**Light color**: Warm white , Cold white , blue , Green , Red **Waterproof**: IP20 , IP56 (+ 1.91 Euro )