

Link to the product: <https://stair-lighting.com/tango-motion-sensor-p-2182.html>



Tango - motion sensor

Price **43.44 Euro**

Availability **Available**

Shipping time **5 days**

Number **2182**

Manufacturer **SKOFF**

Product description

TANGO is a LED lighting fittings produced under an innovative collection of the Music Line by Polish company SKOFF. Like the other products in this series, inspired by the shape of a rectangle and square. We therefore washer surface-colored polished stainless steel or aluminum (optional). On it there is a non-exchangeable LED module mounted in the housing part made of the same materials as the base. Dimensions of the device is 7,3cm width and length.

Music Line is a modern line of flat lighting luminaires guarantee minimal energy consumption. They correspond to the same not only contemporary its effort to minimalism design, but also the prevailing eko-trends. For this model, the power consumption is closed in the same range 0,6-1W depending on the color of emitted light. Here are five colors to choose from: white, warm white, green, red and blue. Lighting time led-module determines the level of 50 thousand. hours, which is a great advantage. Robust design protects the light source from damage in the standard option-room - IP20 and in areas more vulnerable, eg. To moisture and water jets - IP56. In addition, the manufacturer gives 24 months warranty. Installation is a hole with a diameter of 6 cm or forests electro-assembly of the same diameter.

All family of products in this collection is characterized by a specific shape, corresponding to the dynamics of dance. TANGO is a sharp shapes, dynamic, specific as character dance.

LED Lighting fitting, designed to highlight passages

Advantages:

- Long life - 50 000 h
- Very low power consumption
- Robust construction
- Material: Stainless steel or aluminum

Application:

- highlighting passages
- stairs
- risers
- furniture sites
- decorating the walls with light

Available types

Symbol	Finishing	Colour of light emission	Power [W]	Absolute luminous flux [lm]	Luminous efficiency [lm/W]	Index
ML-R-G-W	High-grade steel	white	0,8	19,7±0,5	25,3±0,4	ML-RUE-G-W
ML-R-G-WW	High-grade steel	warm white	0,8	19,7±0,5	-	ML-RUE-G-W
ML-R-G-R	High-grade steel	red	1,0	-	-	ML-RUE-G-R
ML-R-G-B	High-grade steel	blue	0,8	-	-	ML-RUE-G-B
ML-R-G-G	High-grade steel	green	0,6	-	-	ML-RUE-G-G
ML-R-G-W	Aluminum	white	0,8	19,2±0,5	25,3±0,4	ML-RUE-G-W
ML-R-G-WW	Aluminum	warm white	0,8	19,2±0,5	-	ML-RUE-G-W
ML-R-G-R	Aluminum	red	1,0	-	-	ML-RUE-G-R
ML-R-G-B	Aluminum	blue	0,8	-	-	ML-RUE-G-B
ML-R-G-G	Aluminum	green	0,6	-	-	ML-RUE-G-G


Technical data

Supply voltage: 10 V DC/230V

Light source:	LED
Installation:	<ul style="list-style-type: none">• in a Ø60 installation box• in a Ø60 opening
Ingress Protection Rating:	IP 20
Type of connection:	parallel
Recommended power suppliers:	ZOL6, ZOL7, ZOL15, ZOL16

Commercial data:

Device weight:	...
Device dimensions:	73 x 73 mm
Warranty period:	24 mo.

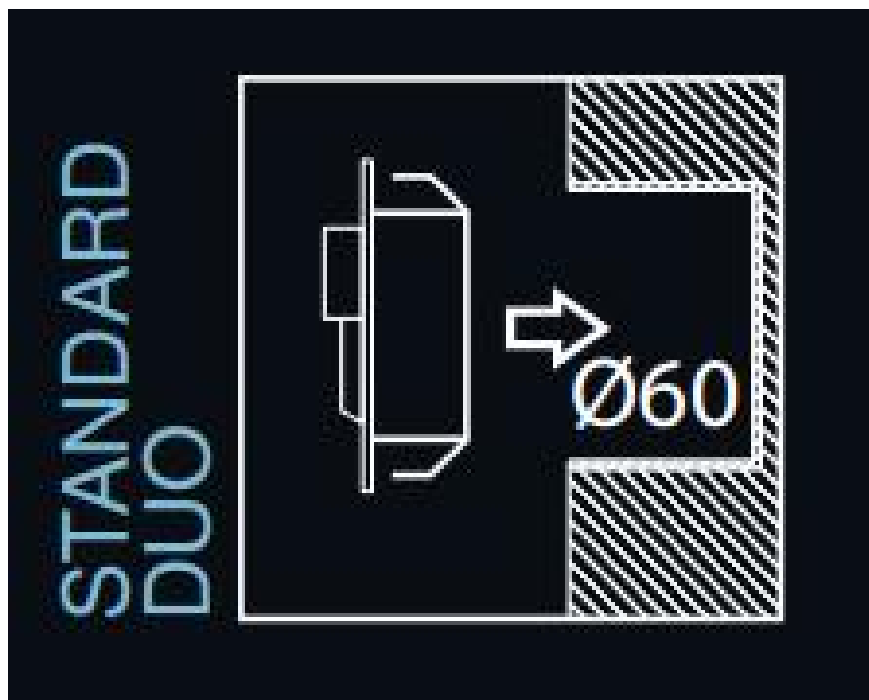

This product has additional options:

Housing: INOX , Aluminum

Light color: Warm white , Cold white , blue , Green , Red

Waterproof: IP20

Power supply voltage - SKOFF: 10V , 230V (+ 11.14 Euro)